

## Informacije o proizvodu (EN)

COOLER MASTER napajanje V850 Gold V2 850W



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/cooler-master-napajanje-v850-gold-v2-850w-akcija-cena/>



Make It Yours.

V850 GOLD - V2  
MPY-850V-AFBAG

## POWER UP



## FEATURES

**80 PLUS Gold Certified** : This certification guarantees a typical efficiency of 90% under normal operating conditions.

**Performance Driven Topology** : The half-bridge LLC resonant converter and DC-DC technology offer reliable and stable voltage outputs for safer, more reliable performance and higher efficiency.

**Semi-Fanless Mode with Hybrid Switch** : The 135mm FDB fan is semi-fanless up to 40% load and can be manually turned off with a hardware based hybrid switch.

**Full-Modular Cabling** : Modular cables reduce clutter, increase airflow, and improve overall efficiency and thermal performance.

**16 AWG PCI-e Cables** : The thicker 16 AWG PCI-e cables allow for higher currents, thereby improving both efficiency and safety.

**10 Year Warranty** : This unit comes with a standard limited manufacturing warranty of 10 years from the date of purchase.

## PACKAGE INFORMATION

| Cable Type | EAN           | UPC          |
|------------|---------------|--------------|
| US         | 4719512091715 | 884102064135 |
| UK         | 4719512091722 | 884102064142 |
| EU         | 4719512091739 | 884102064159 |
| ST         | 4719512091746 | 884102064166 |
| AU         | 4719512091753 | 884102064173 |
| BR         | 4719512091760 | 884102064180 |
| KR         | 4719512091777 | 884102064197 |
| TW         | 4719512091784 | 884102064203 |
| JP         | 4719512091791 | 884102064210 |
| IN         | 4719512091807 | 884102064227 |
| WO         | 4719512091814 | 884102064234 |

|                    |                                           |
|--------------------|-------------------------------------------|
| Nett Weight        | 2.2 kg / 4.85 lb                          |
| Gross Weight       | 2.73 kg / 6.019 lb                        |
| Package Dimensions | 303 x 202 x 125mm (11.93 x 7.95 x 4.92")  |
| Carton Dimensions  | 520 x 318 x 238mm (20.47 x 12.52 x 9.37") |
| Unit / Carton      | 4 pcs                                     |
| Carton / Pallet    | 24 pcs                                    |

The V Gold - v2 offers the high quality user experience you've always wanted. Enjoy an 80 Plus Gold efficiency rating, full-modular cabling, semi-fanless operation, a 135mm FDB fan, 16AWG PCIe high efficiency cables, and a 10 year warranty. Improvements and innovations from the components to the cables deliver a power supply unit fit for any and every type of PC. The 100% Japanese capacitors, half-bridge LLC resonant convertor, and DC-DC circuitry deliver a product that even the pros can respect, at 550, 650, 750, and 850 watt levels. Now available with white casing and cables.

## SPECIFICATIONS

|                        |                                                      |     |                                    |
|------------------------|------------------------------------------------------|-----|------------------------------------|
| Product Name           | V850 Gold - v2                                       |     |                                    |
| Item Code              | MPY-850V-AFBAG                                       |     |                                    |
| ATX Version            | ATX 12V Ver. 2.52                                    |     |                                    |
| PFC                    | Active PFC                                           |     |                                    |
| Input Voltage          | 100-240V                                             |     |                                    |
| Input Current          | 13-6A                                                |     |                                    |
| Input Frequency        | 50-60Hz                                              |     |                                    |
| Dimensions (L x W x H) | 160 x 150 x 86mm                                     |     |                                    |
| Fan Size               | 135mm                                                |     |                                    |
| Fan Bearing            | FDB                                                  |     |                                    |
| Fan Speed              | 1545 RPM                                             |     |                                    |
| Noise @ 20%            | 0 dBA                                                |     |                                    |
| Noise @ 50%            | 15.4 dBA                                             |     |                                    |
| Noise @ 100%           | 32.5 dBA                                             |     |                                    |
| Efficiency             | 90% @ Typical Load                                   |     |                                    |
| 80 PLUS Rating         | 80 PLUS Gold                                         |     |                                    |
| ErP 2014 Lot 3         | Yes                                                  |     |                                    |
| Power Good Signal      | 100-500ms                                            |     |                                    |
| Hold Up Time           | 17ms                                                 |     |                                    |
| MTBF                   | >100,000 hours                                       |     |                                    |
| Protections            | OVP / OPP / SCP / OCP / UVP / OTP                    |     |                                    |
| Regulatory             | CCC, CE, TUV-RH, RCM, EAC, cTUVus, FCC, BSMI, KC, CB |     |                                    |
| Connectors             | ATX 24 Pin                                           | x1  | 1 x 650mm                          |
|                        | EPS 4+4 Pin                                          | x1  | 1 x 650mm                          |
|                        | EPS 8 Pin                                            | x1  | 1 x 650mm                          |
|                        | SATA                                                 | x12 | 3 x 500(s)+120(s)+120(s)+120(s) mm |
|                        | Peripheral 4 Pin                                     | x4  | 1 x 500(p)+120(p)+120(p)+120(p) mm |
|                        | PCI-e 6+2 Pin                                        | x6  | 3 x 600+120mm                      |

|             |                         |     |       |      |        |
|-------------|-------------------------|-----|-------|------|--------|
| AC INPUT    | 100-240V~ 13-6A 50-60Hz |     |       |      |        |
| DC OUTPUT   | +3.3V                   | +5V | +12V  | -12V | +5Vstb |
|             | 20A                     | 20A | 70.4A | 0.3A | 3A     |
| TOTAL POWER | 130W                    |     | 844W  | 3.6W | 15W    |
|             | 850W                    |     |       |      |        |

## FEATURES




This certification guarantees a typical efficiency of 90% under normal operating conditions.



The half-bridge LLC resonant converter and DC-DC technology offer reliable and stable voltage outputs for safer, more reliable performance and higher efficiency.



The 135mm FDB fan is semi-fanless up to 40% load and can be manually turned off with a hardware based hybrid switch.

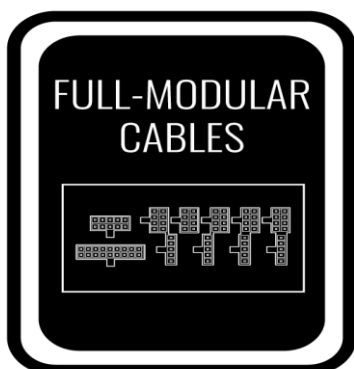

Modular cables reduce clutter, increase airflow, and improve overall efficiency and thermal performance.



The thicker 16 AWG PCI-e cables allow for higher currents, thereby improving both efficiency and safety.



This unit comes with a standard limited manufacturing warranty of 10 years from the date of purchase.



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Cooler Master, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/cooler-master-napajanje-v850-gold-v2-850w-akcija-cena/>