

Uputstvo za upotrebu (EN)


CHIEFTEC kućište GP-03B-OP



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/chieftec-kuciste-gp-03b-op-akcija-cena/>

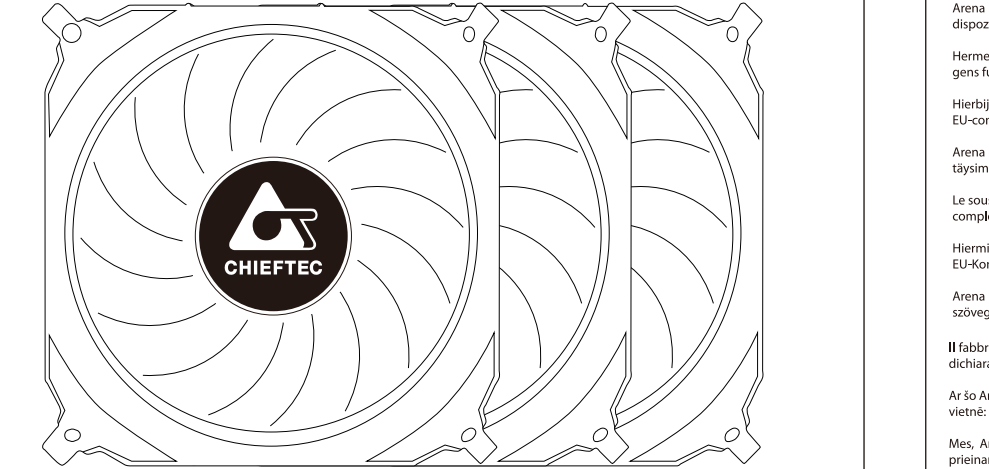

Ultimate illumination with 16.8 M colors
Support various M/B RGB lighting systems

Declaration of Conformity for CF-3012-RGB



Hereby, Arena Electronic GmbH declares that the equipment type CF-3012-RGB is in compliance with Directive: 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

С настоящим Arena Electronic GmbH декларация, что радиосовместимость тип CF-3012-RGB в соответствии с Директивой: 2014/53/ЕС. Целостный текст на ЕС декларация доступна по следующему интернет адресу: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH ovime izjavljuje da je radijska oprema tipa CF-3012-RGB u skladu s Direktivom: 2014/53/EU. Cjeloviti tekst EU izjave o skladnosti dostupan je na sledećoj internetkoj adresi: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH tímto prohlašuje, že rádiové zariadenie typu CF-3012-RGB je v súlade so smernicou: 2014/53/EU. Úplné znenie EU prohlásenia o zhode je k dispozícii na tejto internetovej adrese: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Hiermit erkläre Arena Electronic GmbH, at radioausstrittstypen CF-3012-RGB er i overensstemmelse med direktiv: 2014/53/EU. EU-overensstemmelseserklæring fulde tekst kan findes på følgende internetadresse: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Hierbij verklaart Arena Electronic GmbH dat het type radioapparatuur CF-3012-RGB conform is met Richtlijn: 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH vakuuttaa, että radiolaitetyyppi CF-3012-RGB on direktiivin: 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Le soussigné, Arena Electronic GmbH, déclare que l'équipement radioélectrique du type CF-3012-RGB est conforme à la directive: 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Hiermit erklärt Arena Electronic GmbH, dass der Funkbauseigentyp CF-3012-RGB der Richtlinie: 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH izjavlja, da je CF-3012-RGB tipa radioizlase skladno s direktivo: 2014/53/EU. Celoten besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Il fabbricante, Arena Electronic GmbH, dichiara che il tipo di apparecchiatura radio CF-3012-RGB conforme alla direttiva: 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Ar šio Arena Electronic GmbH deklaracija, ka radiokortas CF-3012-RGB atitikt Direktivą: 2014/53/ES. Pilnas ES atitikties deklaracijos tekstas ir piešiamas šios interneto adresu: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Mes, Arena Electronic GmbH, patvirtiname, kad radio įrenginio tipas CF-3012-RGB atitinka Direktivą: 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Herved erklære Arena Electronic GmbH at radiostråletypen CF-3012-RGB er i samsvar med direktiv: 2014/53/EU. EU-erklæring fuldstændig finner du på Internet under: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH niniejszym oświadczam, że typ urządzenia radiowego CF-3012-RGB jest zgodny z dyrektywą: 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Ola abaixo assinado(a) Arena Electronic GmbH declara que o presente tipo de equipamento rádio CF-3012-RGB está em conformidade com a Diretiva: 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço eletrônico: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Prin prezenta, Arena Electronic GmbH declară că tipul de echipament radio CF-3012-RGB este în conformitate cu Directiva: 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH potvrdjuje, da je tip radijske opreme CF-3012-RGB skladen s Direktivo: 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Arena Electronic GmbH tímto vyhlasuje, že rádiové zariadenie typu CF-3012-RGB je v súlade so smernicou: 2014/53/EU. Úplné EU vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Por la presente, Arena Electronic GmbH declara que el tipo de equipo radioeléctrico CF-3012-RGB es conforme con la Directiva: 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

Härmed förklarar Arena Electronic GmbH att denna typ av radioutrustning CF-3012-RGB överensstämmer med direktiv: 2014/53/EU. Den fullständiga texten till EU-förklaring om överensstämmelse finns på följande webbadress: <https://www.chieftec.eu/products-detail/264/CF-3012-RGB>

The TORNADO is a comprehensive controller that integrates colorful lighting with motherboard synchronization and fan speed control. It is specially designed for chassis lighting synchronization control.

Features:

1: Designed for chassis lighting synchronization control with a reserved reset switch and (PH2.0) 4P connector to front panel.

2: The one-button sync light effect can be switched as desired. The standard MCU has an integrated lighting effect.

3: Built - in three - way button on the PCB for function switching.

4: Optional RF remote control for an open distance to reach more than 30M.

5: The third fan offers precise speed regulation and has the function of automatically correcting the fan speed. The fan speed is displayed by the LED light colors. (Remarks: The speed light indication is not installed by default, and it is installed according to customer requirements).

6: It can connect 6 color fans and 2 light strips.

7: 20 dynamic lighting modes, 9 static modes.

8: 12V / 5V dual - group power supply SATA interface.

Interface Description:

1: Power supply port: on SATA connector port, 12V and 5V dual - group power supply, 12V→3A (max.) & 5V→3A (max.). If more current is required, please communicate with us.

2: Fan connector port: (PH2.0) 6P, the interface is parallel, 6 - way fan lighting synchronization, line sequence: FAN / 12V / FGND / LGND / DATA / +5V.

3: Light - strip connector port: DuPont RGB needle holder *4P, can be connected with 2 light - strips at the same time, each light - strip does not exceed 2m length, that means that the maximum support is with 180 lights.

4: Expansion Button port: a: (DuPont) 2.54*2P, you can reset the button to control the lighting. b: (PH2.0) 4P port, extended to the front panel to control lights and fans.

5: Motherboard signal synchronization connector: PH2.0 4P connector, can synchronize the motherboard lighting effects.

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.


3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions


- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Control board interface:

as below attached CAD

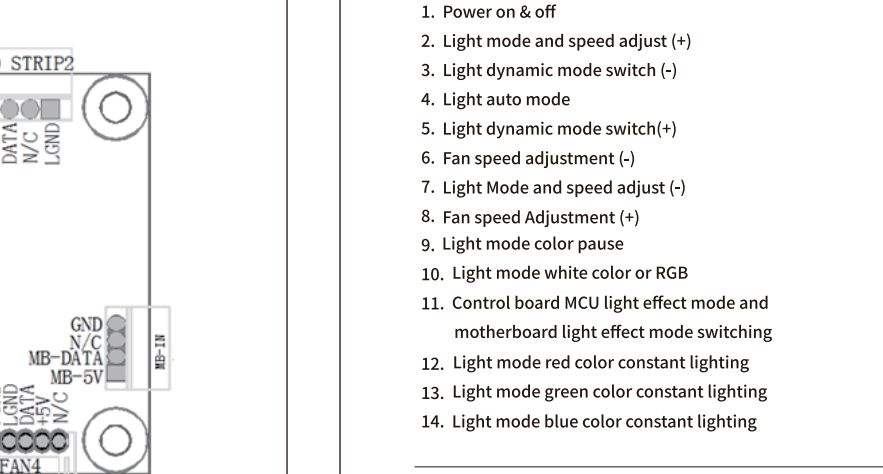

Control box picture:

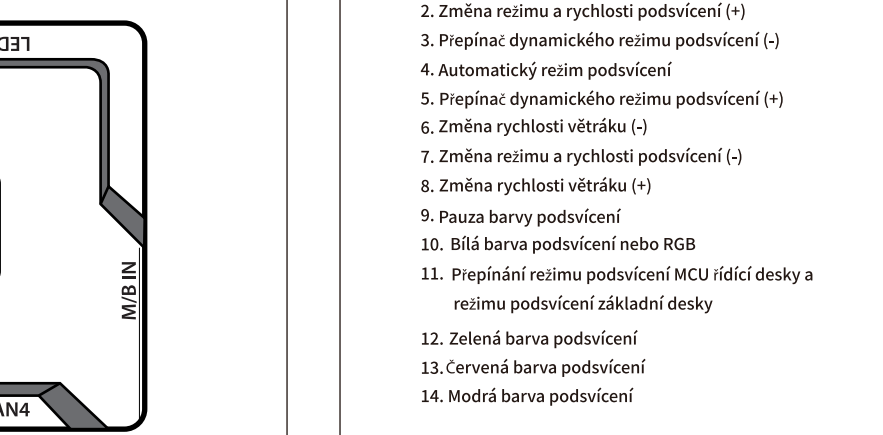

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Buttons Description:

1: LED button: for lighting mode and on/off light. Multiplex button, short press to switch 20 kinds of dynamic light mode with cycle mode. Long press (3 sec.) to turn on/off the light. 9 static modes can be switched by remote control.

2: LOW button (SLOW): Fan speed reduction button and synchronous switching. Short press to adjust the fan speed minus, long press the button in 3 sec. to switch signal to the motherboard synchronization mode, while in the motherboard mode, long press this button in 3 sec. to switch back to the MCU light mode.

3: HIGH button (FAST): Fan speed adjustment button and light color selection button, divided into three switch positions, adjusted to the highest level full speed 12V is not in the loop. Press and hold 3 sec. to select the color under the current dynamic mode.

Fan speed specification:

1: Our unique automatic correction function can automatically adjust the fan speed according to the quantity of the fans and loading, so that the fan is at a constant setting state with an accuracy of less than 0.2V, effectively reducing fan noise and current sound, prolonging Fan lifecycle and enhancing fan compatibility.

2: Fan drives capability: the total power of the fan is no more than 12V 2.5A.

3: Fan default speed: 9V (medium speed), divided into three switches, low speed 7V ± 0.2V, medium speed 9V ± 0.2V, full speed 12V. The LOW button reduces the fan speed to the minimum speed, and the HIGH button increases the fan speed to full speed.

RF remote control instructions

- 1.RF frequency of use: 433.92M
- 2.Emission distance: more than 30M (open distance), transmission power: 10mw
- 3.Button lifecycle: more than 100,000 times

Manufacturer: Arena Electronic GmbH
Koppersstr. 18, 40549 Düsseldorf, Germany
www.chieftec.eu

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Chieftec, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/chieftec-kuciste-gp-03b-op-akcija-cena/>