

## Informacije o proizvodu (EN)

FRACTAL DESIGN Lumen S36 v2 (FD-W-L1-S3611) vodeno hlađenje



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/fractal-design-lumen-s36-v2-fd-w-l1-s3611-vodeno-hladjenje-akcija-cena/>

# Product Sheet

# Lumen

English Version



# Index

<b>3</b>	<b>Overview</b>
<b>4</b>	<b>Key features</b>
<b>5-8</b>	<b>General specifications</b>
<b>9-10</b>	<b>Package contents</b>
<b>11</b>	<b>Additional information</b>

# Lumen


## Color coordinated cooling

Customize your water-cooling from subtle to stunning with Lumen's six addressable LEDs that you can command via motherboard or controller. Compatible with most common Intel/AMD sockets and RGB certified by industry standards, the Lumen is an attractive proposition for starting and seasoned builders alike.



# Key features

- Duality design provides both a stealthy and illuminated look, controlled from your motherboard RGB UI
- Six ARGB LEDs are yours to command via your motherboard or controller
- The removable top can be turned at 90-degree intervals, making the logotype horizontal independent of the mounting orientation
- Pre-applied thermal paste ensures an easy installation
- Supports the most common sockets for both Intel and AMD
- Aspect fans for low turbulence and chaining support
- Articulating elbow fittings make tubes easier to route and reduces tension on the cold plate housing
- Current certifications include Asus AURA, Gigabyte Fusion, MSI Mystic Light, Razer Chroma and ASRock Polychrome support
- Low-permeability rubber tubes with braided nylon sleeves

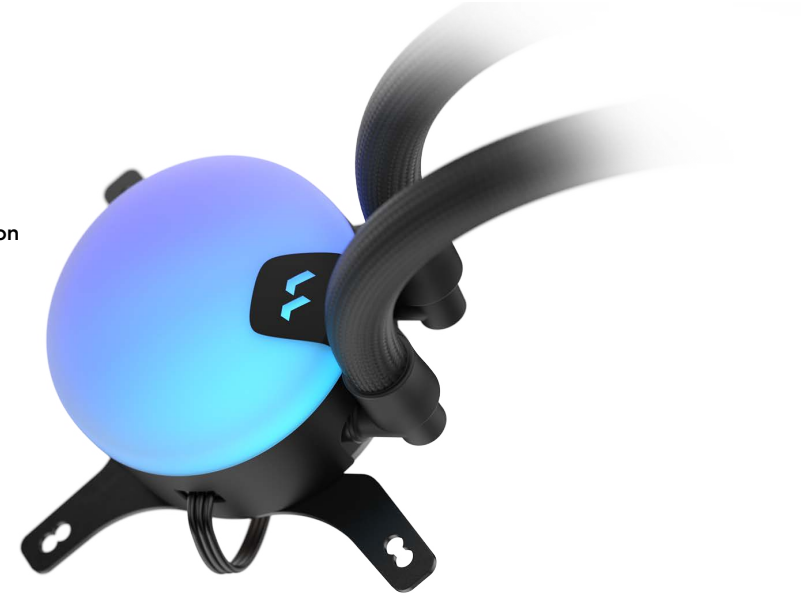

# General specifications

FAN Specification	Lumen S24 RGB	Lumen S28 RGB	Lumen S36 RGB
Fan type	• Aspect 12 RGB PWM	• Aspect 14 RGB PWM	• Aspect 12 RGB PWM
Fan rotational speed	• 500–2000 RPM	• 500–1700 RPM	• 500–2000 RPM
Fan bearing	• Rifle bearings	• Rifle bearings	• Rifle bearings
Fan PWM control	• Yes	• Yes	• Yes
Fan acoustical noise	• <10–33.2 dBA	• <10–35.5 dBA	• <10–33.2 dBA
Fan maximum air flow	• 13–56 CFM	• 20–78 CFM	• 13–56 CFM
Fan maximum static pressure	• 0.230–2.34 mm H2O	• 0.3–2.05 mm H2O	• 0.230–2.34 mm H2O
Fan input voltage	• 12V	• 12V	• 12V
Fan maximum input current	• 0.37 A	• 0.24 A	• 0.37 A
Fan MTTF	• 90 000 hours	• 90 000 hours	• 90 000 hours
Fan 4-pin Cable length	• 500 mm	• 500 mm	• 500 mm
Fan aRGB 5V, 3-Pin Cable length	• 500 mm	• 500 mm	• 500 mm

Specification	Lumen S24 RGB	Lumen S28 RGB	Lumen S36 RGB
Cold plate material	• Copper	• Copper	• Copper
Thermal paste	• Pre-applied	• Pre-applied	• Pre-applied
Block Height	• 43 mm	• 43 mm	• 43 mm
Block measurements (with fittings)	• 79 x 67 mm	• 79 x 67 mm	• 79 x 67 mm
Block diameter (main block body)	• 67 mm	• 67 mm	• 67 mm
Sockets supported (Intel)	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066
Sockets supported (AMD)	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2

# General specifications

Specification	Lumen S24 RGB	Lumen S28 RGB	Lumen S36 RGB
Tube material	• Low-permeability rubber with braided nylon sleeve	• Low-permeability rubber with braided nylon sleeve	• Low-permeability rubber with braided nylon sleeve
Fittings, block side	• Articulating 90-degree Elbow	• Articulating 90-degree Elbow	• Articulating 90-degree Elbow
Fittings, radiator side	• Barbed fitting	• Barbed fitting	• Barbed fitting
Warranty	• 5 years	• 5 years	• 5 years
Pump rotational speed	• 4000 ± 10% RPM	• 4000 ± 10% RPM	• 4000 ± 10% RPM
Pump bearing type	• Ceramic	• Ceramic	• Ceramic
Pump PWM control	• No	• No	• No
Pump acoustical noise (full speed)	• 22 dBA	• 22 dBA	• 22 dBA
Pump maximum pressure	• 1.8 mm H <sub>2</sub> O / 17.6 kPa / 2.5 PSI	• 1.8 mm H <sub>2</sub> O / 17.6 kPa / 2.5 PSI	• 1.8 mm H <sub>2</sub> O / 17.6 kPa / 2.5 PSI
Pump input voltage	• 12V DC	• 12V DC	• 12V
Pump input current (without fans)	• 0.34 A	• 0.34 A	• 0.34 A
Pump MTTF	• 50 000 hours	• 50 000 hours	• 50 000 hours
Radiator dimensions	• 272 x 120 x 27 mm	• 313 x 140 x 27 mm	• 392 x 120 x 27 mm
Radiator housing material	• Aluminum	• Aluminum	• Aluminum
Radiator fin material	• Aluminum	• Aluminum	• Aluminum
Radiator fan screw threads	• 6–32	• 6–32	• 6–32
Tube Length	• 400 mm	• 400 mm	• 400 mm
Pump power cable length	• 775 mm	• 775 mm	• 775 mm
aRGB 5V, 3-Pin cable	• 500 mm	• 500 mm	• 500 mm

# General specifications

Fan specification	Lumen S24	Lumen S28	Lumen S36fan
Fan type	• Aspect 12 PWM	• Aspect 14 PWM	• Aspect 12 PWM
Fan rotational speed	• 500–2000 RPM	• 500–1700 RPM	• 500–2000 RPM
Fan bearing	• Rifle bearings	• Rifle bearings	• Rifle bearings
Fan PWM control	• Yes	• Yes	• Yes
Fan acoustical noise	• <10–33.2 dBA	• <10–35.5 dBA	• <10–33.2 dBA
Fan maximum air flow	• 13–56 CFM	• 20–78 CFM	• 13–56 CFM
Fan maximum static pressure	• 0.23–2.34 mm H2O	• 0.3–2.05 mm H2O	• 0.23–2.34 mm H2O
Fan input voltage	• 12V	• 12V	• 12V
Fan maximum input current	• 0.37 A	• 0.24 A	• 0.37 A
Fan MTTF	• 90 000 hours	• 90 000 hours	• 90 000 hours
Fan 4-pin Cable length	• 500 mm	• 500 mm	• 500 mm
Fan aRGB 5V, 3-Pin Cable length	• 500 mm	• 500 mm	• 500 mm

Specification	Lumen S24	Lumen S28	Lumen S36
Cold plate material	• Copper	• Copper	• Copper
Additional sound damping	No	• No	• No
Thermal paste	• Pre-applied	• Pre-applied	• Pre-applied
Block Height	• 43 mm	• 43 mm	• 43 mm
Block measurements (with fittings)	• 79 x 67 mm	• 79 x 67 mm	• 79 x 67 mm
Block diameter (main block body)	• 67 mm	• 67 mm	• 67 mm
Sockets supported (Intel)	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066	• LGA 1150/1151/1155/1156/1200 LGA 1366/2011/2011-3/2066
Sockets supported (AMD)	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2	• AM4/FM2+/FM2/ FM1/AM3+/AM3/AM2+/AM2



# General specifications

	Lumen S24	Lumen S28	Lumen S36
Tube length	• 400 mm	• 400 mm	• 400 mm
Tube material	• Low-permeability rubber with braided nylon sleeve	• Low-permeability rubber with braided nylon sleeve	• Low-permeability rubber with braided nylon sleeve
Fittings, block side			
Fittings, radiator side	• Articulating 90-degree Elbow	• Articulating 90-degree Elbow	• Articulating 90-degree Elbow
Warranty	• Barbed fitting	• Barbed fitting	• Barbed fitting
Pump bearing type	• 5 years	• 5 years	• 5 years
Pump PWM control	• Ceramic	• Ceramic	• Ceramic
Pump acoustical noise (full speed) [dB(A)]	• No	• No	• No
Pump maximum pressure	• 22 dBA	• 22 dBA	• 22 dBA
Pump input voltage	• 1.8 m H2O/ 17.6 kPa / 2.5 PSI	• 1.8 m H2O/ 17.6 kPa / 2.5 PSI	• 1.8 m H2O/ 17.6 kPa / 2.5 PSI
Pump input current (without fans)	• 12 V DC	• 12 V DC	• 12 V DC
Pump MTTF	• 0.34 A	• 0.34 A	• 0.34 A
Radiator dimensions	• 50 000 hours	• 50 000 hours	• 50 000 hours
Radiator housing material	• 272 x 120 x 27 mm	• 312 x 140 x 27 mm	• 392 x 120 x 27 mm
Radiator fin material	• Aluminum	• Aluminum	• Aluminum
Radiator fan screw threads	• Aluminum	• Aluminum	• Aluminum
Tube Length	• 6–32	• 6–32	• 6–32
Pump power cable length	• 400 mm	• 400 mm	• 400 mm
aRGB 5V, 3-Pin cable length	• 775 mm	• 775 mm	• 775 mm
	• 500 mm	• 500 mm	• 500 mm

# Package contents

## Lumen S24 RGB

- CPU Cooler Assembly
- 2x Aspect 12 RGB fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x8
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

## Lumen S28 RGB

- CPU Cooler Assembly
- 2x Aspect 14 RGB fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x8
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

## Lumen S36 RGB

- CPU Cooler Assembly
- 3x Aspect 12 RGB fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x12
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

# Package contents

## Lumen S24

- CPU Cooler Assembly
- 2x Aspect 12 BLCK fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x8
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

## Lumen S28

- CPU Cooler Assembly
- 2x Aspect 14 BLCK fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x8
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

## Lumen S36

- CPU Cooler Assembly
- 3x Aspect 12 BLCK fans
- User Manual x1
- Thumb screw x4
- 6-32 Mounting Screw (short/long) x12
- Bracket for Intel x1
- Washer x4
- Spacer x4
- Intel 115X Backplate x1
- Intel 115X Mounting Standoff x4
- Intel 2011 Mounting Standoff x4
- AMD Mounting Standoff x2
- Bracket for AMD x1
- 5V ARGB cable x1

# Additional information

Product	SKU	EAN	UPC	JAN
Lumen S24 RGB	FD-W-L1-S2402	7340172703389	843276103385	4537694287333
Lumen S28 RGB	FD-W-L1-S2802	7340172703396	843276103392	4537694287340
Lumen S36 RGB	FD-W-L1-S3602	7340172703402	843276103408	4537694287357
Lumen S24	FD-W-L1-S2401	7340172703419	843276103415	4537694287302
Lumen S28	FD-W-L1-S2801	7340172703426	843276103422	4537694287319
Lumen S36	FD-W-L1-S3601	7340172703433	843276103439	4537694287326

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Fractal Design, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/fractal-design-lumen-s36-v2-fd-w-l1-s3611-vodeno-hladjenje-akcija-cena/>