

Uputstvo za upotrebu (EN)

GAMDIAS napajanje Helios M1-750B 750W




Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/gamdias-napajanje-helios-m1-750b-750w-akcija-cena/>

STEP by STEP INSTALLATION GUIDE



HELIOS | M1-450B
85% EFFICIENCY POWER SUPPLY

HELIOS | M1-550B
85% EFFICIENCY POWER SUPPLY

HELIOS | M1-650B
85% EFFICIENCY POWER SUPPLY

HELIOS | M1-750B
85% EFFICIENCY POWER SUPPLY

Package Contents

Model Name	HELIOS M1-450B				
AC Input	100-240V~ , 3.5-7A , 47-63 Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max. Output Current	16A	12A	33A	0.3A	2.5A
Max. Output Power	90W		396W	3.6W	12.5W
Total Power	450W				

Model Name	HELIOS M1-550B				
AC Input	100-240V~ , 4-8A , 47-63 Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max. Output Current	18A	13A	42A	0.3A	2.5A
Max. Output Power	100W		504W	3.6W	12.5W
Total Power	550W				

Model Name	HELIOS M1-650B				
AC Input	100-240V~ , 5-10A , 47-63 Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max. Output Current	18A	18A	48A	0.4A	2.5A
Max. Output Power	100W		576W	4.8W	12.5W
Total Power	650W				


Model Name	HELIOS M1-750B				
AC Input	100-240V~ , 5.5-11A , 47-63 Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max. Output Current	18A	18A	56A	0.4A	2.5A
Max. Output Power	100W		672W	4.8W	12.5W
Total Power	750W				



The power supply should be powered by the source indicated on the rating label

Package Contents

A

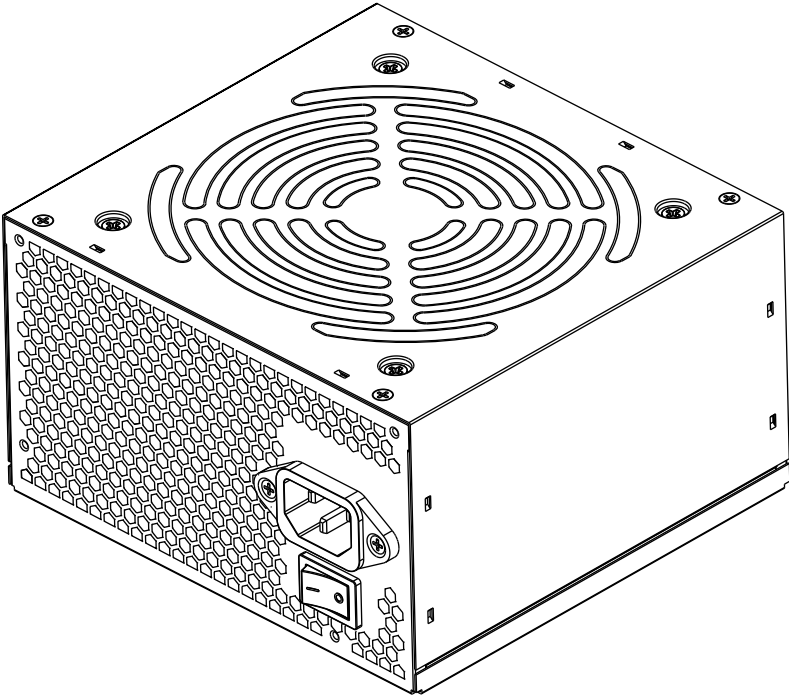


X1

B




X4

1 Turn off the PSU before installing by pushing I/O switch to "O" position.

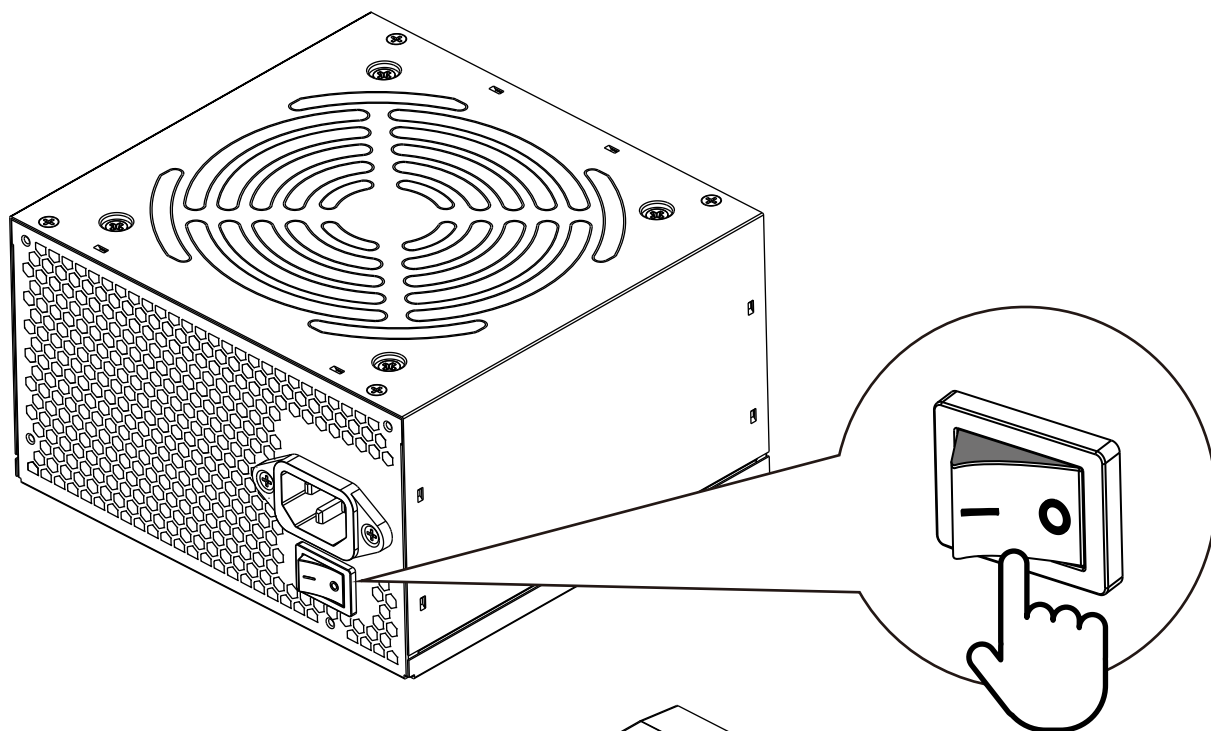


2

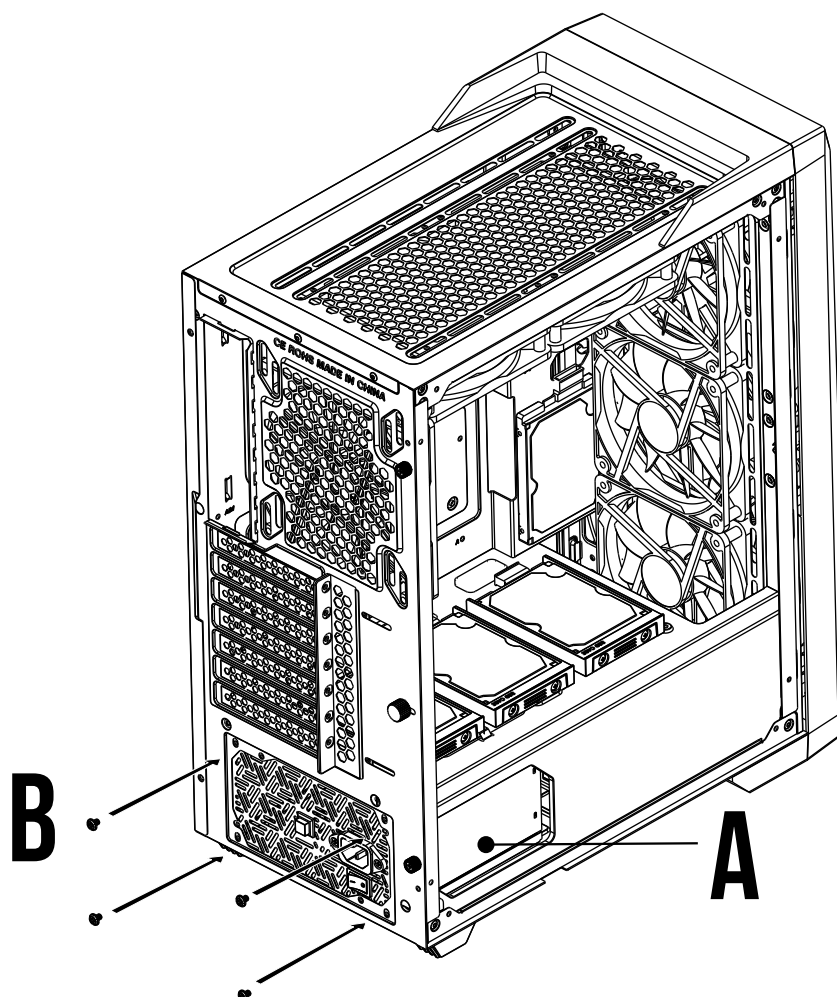


3 Motherboard

A

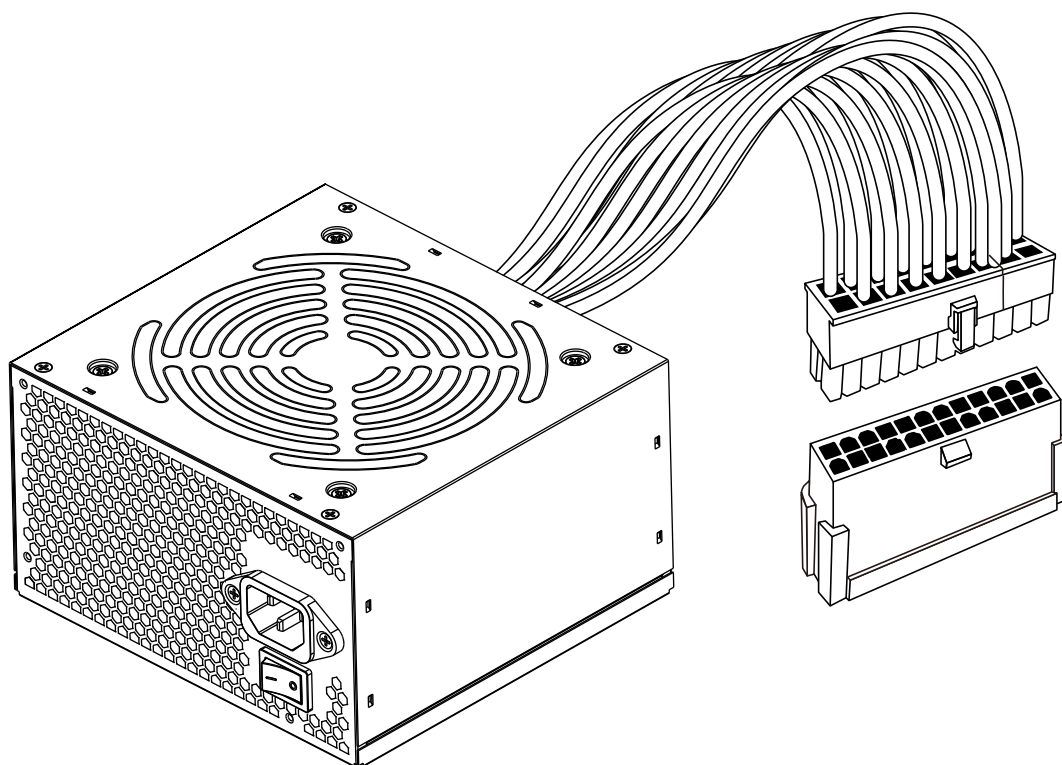


4 CPU

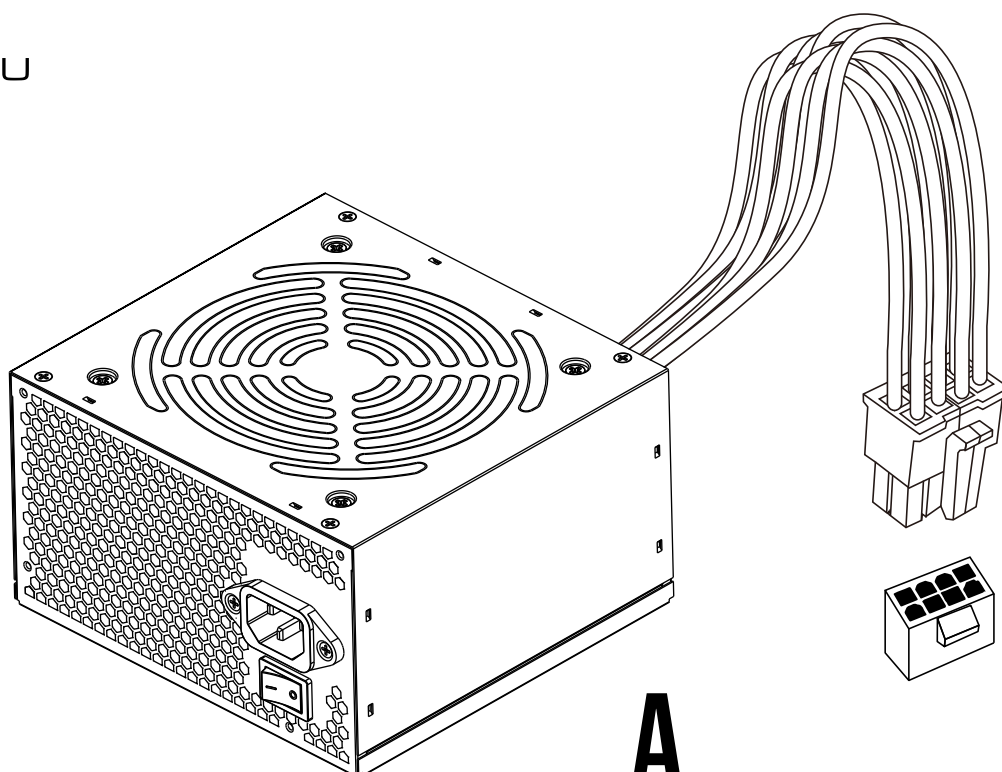

A


5

PCIE

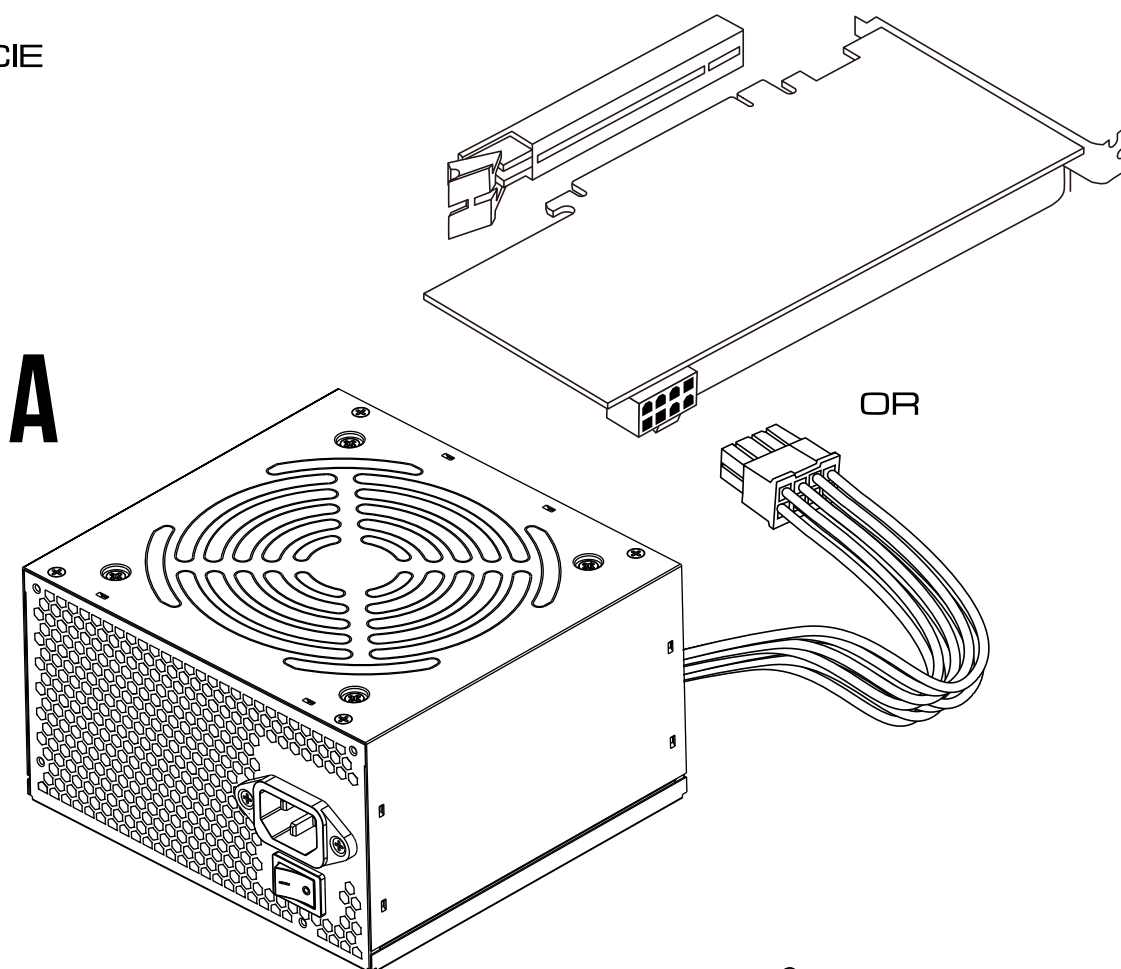


6

SATA

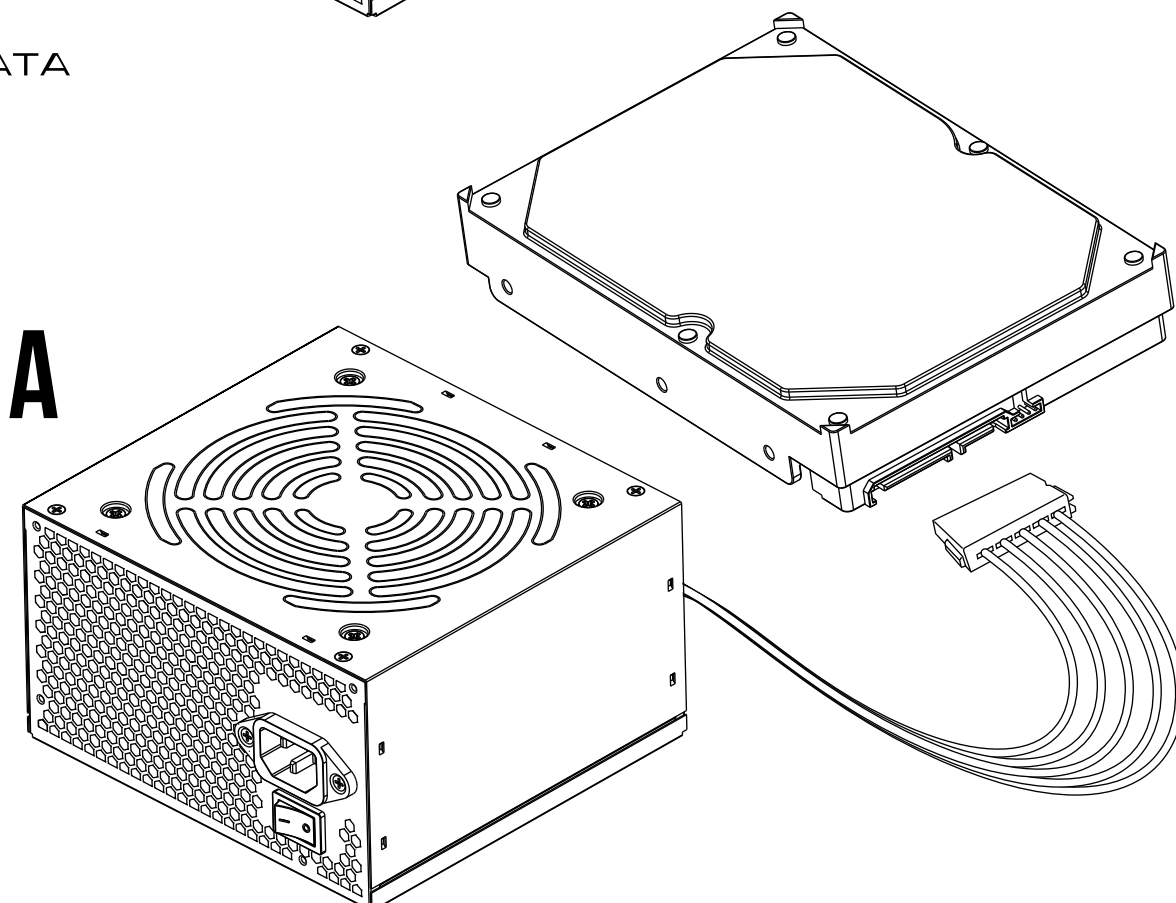


7

Molex

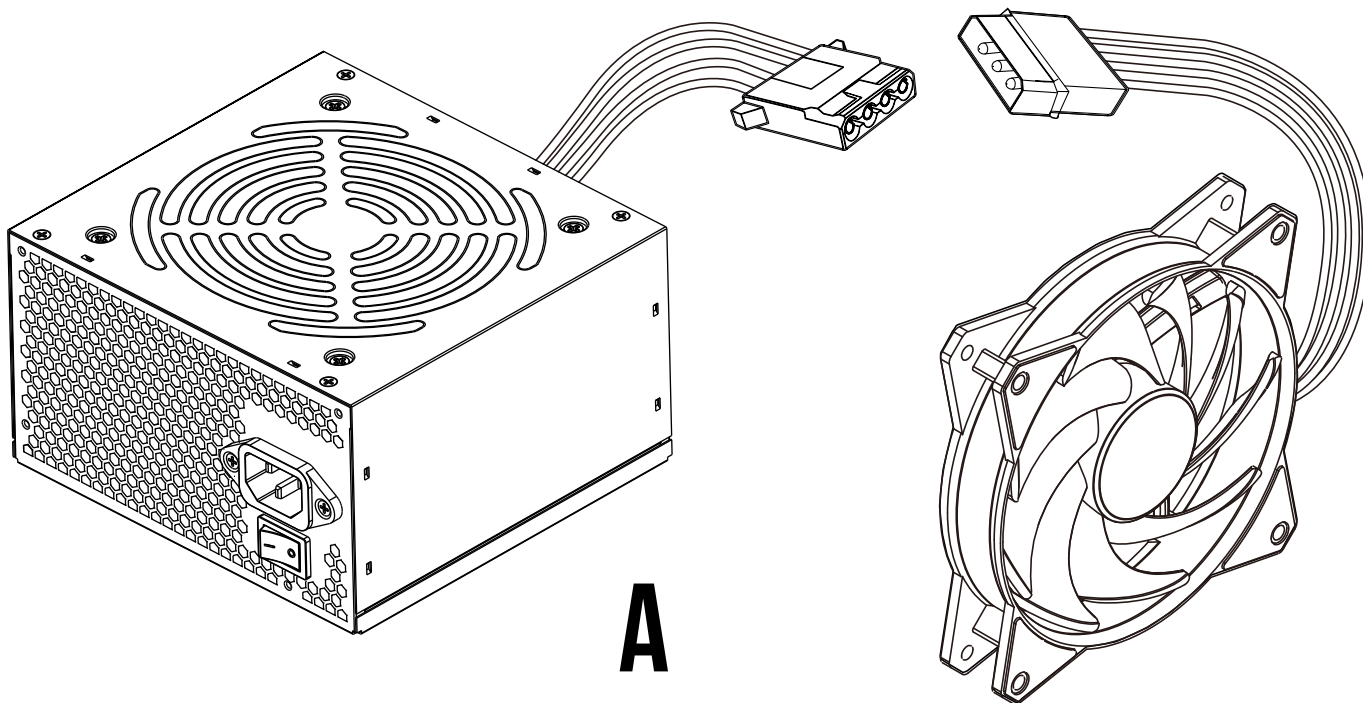


8

Plug in the AC power cord.

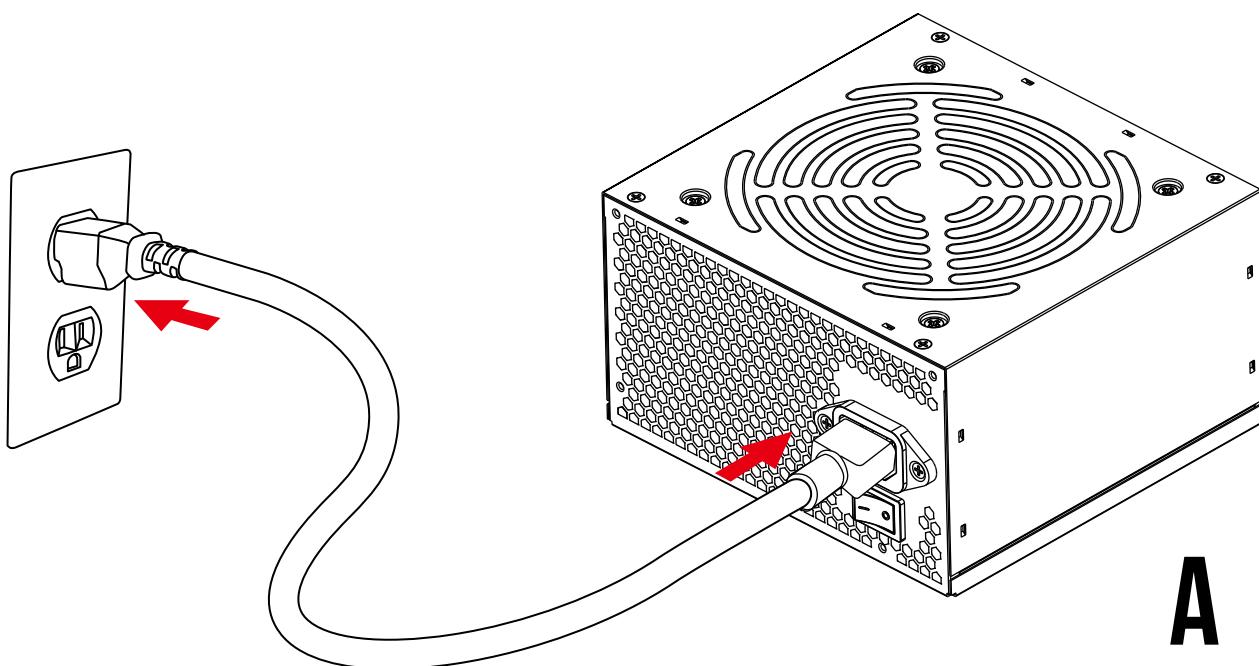

9

Turn on the PSU after installing by pushing I/O switch to "I" position.

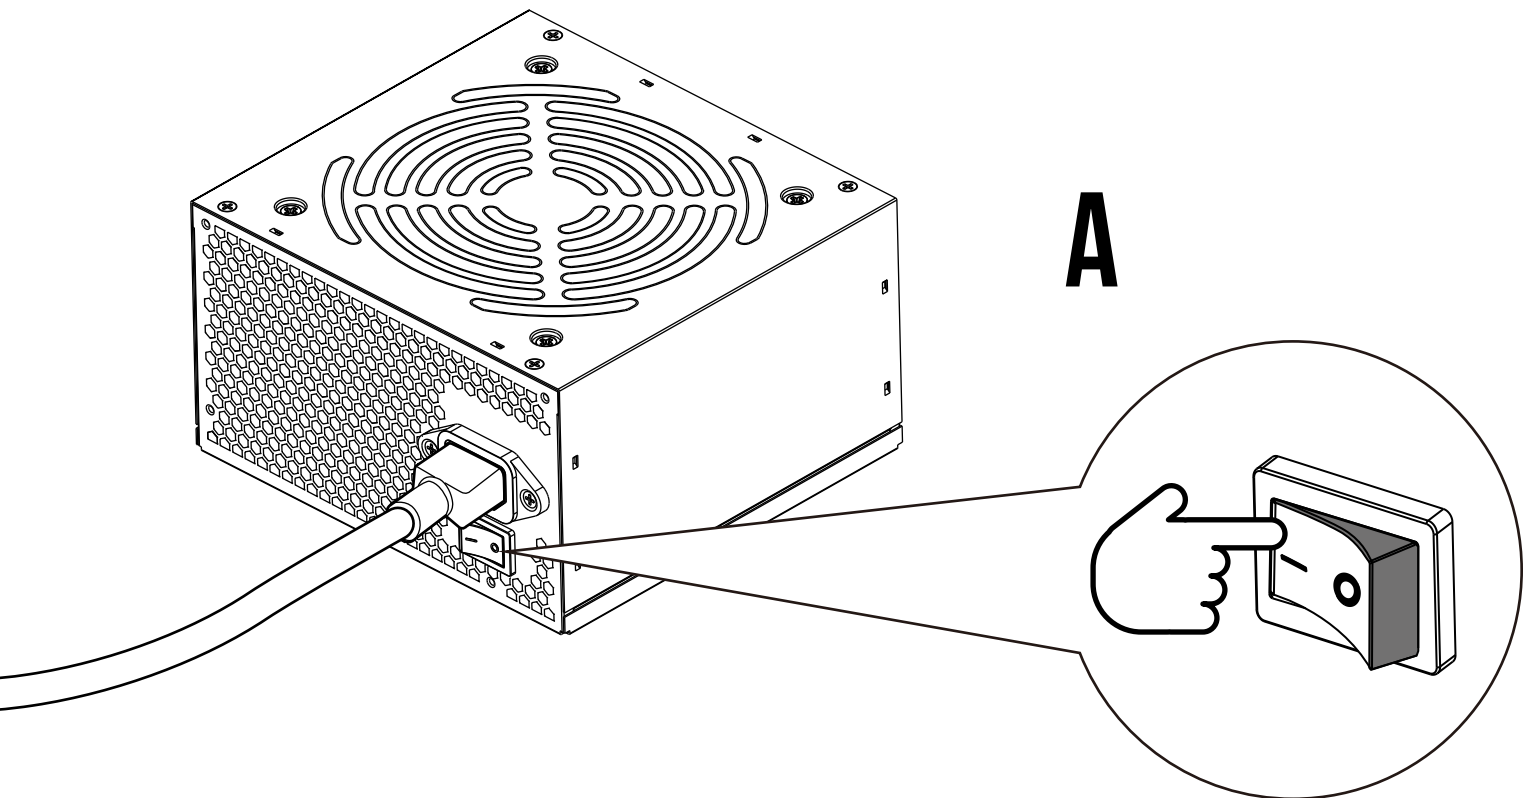



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Gamdias, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/gamdias-napajanje-helios-m1-750b-750w-akcija-cena/>