

Informacije o proizvodu (EN)

CLAGE protočni bojler M4



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/clage-protocni-bojler-m4-akcija-cena/>

E-mini instant water heater M



Application areas

Single point supply:

- > Washbasin
- > Sanitary facilities in commercial buildings
- > Kitchenette (M6 or M7)



E-mini instant water heater

M

Product information



	Energy efficiency class A (Scale: A+ to F)			
	M3	M4	M6	M7
Part number:	1500-17003	1500-17004	1500-17006	1500-17007
Type:	open-outlet			
Water connections (thread connections):	G 3/8"			
Hot water output at $\Delta t = 25\text{K}^{1)}$ [l/min]:	2.0	2.5	3.3	3.7
Switch-on flow rate / max. flow rate ²⁾ [l/min]:	1.3 / 2.0	1.8 / 2.5	2.2 / 3.3	2.4 / 3.7
Nominal power rating [kW]:	3.5	4.4	5.7	6.5
Supply voltage [1~ / N / PE 230 V AC]:	with plug ³⁾	permanent connection	permanent connection	
Supply voltage [2~ / PE 400 V AC]:				permanent connection
Nominal current [A]:	15	19	25	16
Required cable diameter [mm ²]:	1.5	2.5	4.0	2.5
Bare wire heating system IES [®] :	✓			
VDE approved / Protection class:	✓ / IP 25			
Specific water resistance at 15 °C [Ωcm] \geq :	1100			
Nominal volume [litres]:	0.2			
Weight filled with water [kg]:	approx. 1.5			
Dimensions (height × width × depth) [cm]:	13.5 × 18.6 × 8.7			

1) Temperature increase e.g. from 15 °C to 40 °C 2) Limited flow amount for optimal temperature increase. Can be adjusted via water amount adjustment. 3) Also available as M3 (E) [part no.: 1500-170032] with power supply cable for permanent connection.


Description

- > Hydraulically controlled instant water heater (undersink model) with compact design for the energy-efficient hot water supply of a washbasin or a kitchenette
- > Cost-efficient and quick installation, ideally suited for replacing open-outlet water storage heaters
- > The full heating capacity turns on automatically as soon as water flows through the unit
- > Efficient flow technology for an optimum water jet and economical water consumption
- > The efficient bare wire heating system IES[®] with replaceable heating cartridge provides an extended service life and easy maintenance
- > Vented design, only suitable for open-outlet taps
- > Aerator insert for tap adapter M22/24 at the tap is included

Profitability comparison (Source: www.clage.com)

Saves up to 85 % energy compared to conventional small storage heaters.

The E-compact instant water heater features an economical operation. The water is heated directly as it flows through the unit. Hot water is not stored in a tank, which saves standby energy that would be otherwise required.

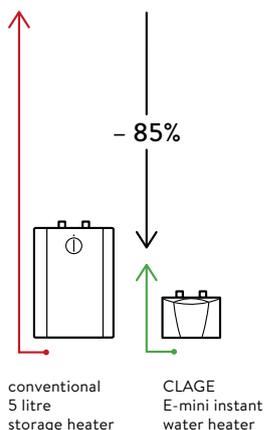

E-mini instant water heater

M

Installation



Example of an **open-outlet** installation


Measurements in mm

Assembly and operating instructions must be observed upon installation.

Using the aerator (included):

- M3 / 4: **CSP 3** 
- M6 / 7: **CSP 6** 

Tap for vented water heaters with three connecting hoses

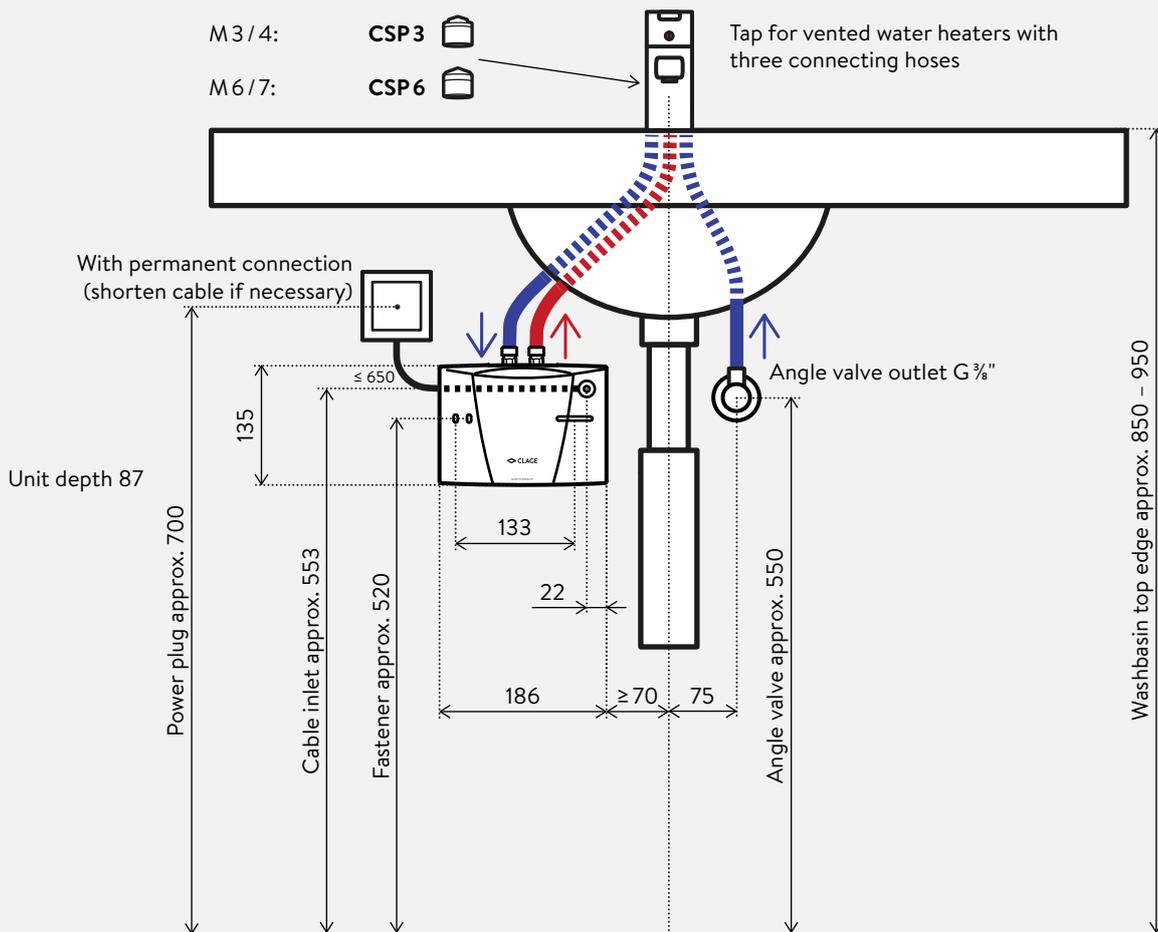



Aerator CSP3 or CSP6 (included)

The aerator at the tap supports the energy- and water-saving operation of the compact instant water heater. The new special CSP aerators mix air into the water and thus create a uniform water stream that does not splatter but softly cascades down.

Aerator insert for tap adapter M22/24 at the tap

CSP3 (< 2l / min): Part no. 0010-00421

CSP6 (< 3.5l / min): Part no. 0010-00461



AEB / AEN (optional)

Contactless, electronically controlled sensor tap with hygienic rinse activation, height × width: 13.3 × 14.0 cm

AEB: 6V-battery operation, Part no. 1100-04250

AEN: with 230 V-power supply, Part no. 1100-04255



END (optional)

Singel-lever mixer tap with Easy-Fix mounting system and pull-up drain stopper, spout 10.5 cm, height × width: 11.1 × 15.2 cm

END: Part no. 1100-04410



EWT (optional)

Single lever mixing tap for pressureless installation with nickel- and lead-free water lines, Easy Fix mounting system and pull-up drain stopper, spout 11.2 cm, height × width: 15.1 × 17.5 cm

EWT: Part no. 1100-04420



SNM (optional)

Two-handle washbasin mixer tap with swivel spout 16 cm,
height × width: 22.5 × 16.0 cm

SNM: Part no. 1100-04200

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Clage, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/clage-protocni-bojler-m4-akcija-cena/>