

Informacije o proizvodu (EN)

nJoy Cadu 2000 1200 UPCMTLS620HCAAZ01B UPS uređaj



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/njoy-cadu-2000-1200-upcmtls620hcaaz01b-ups-uredjaj-akcija-cena/>

Cadu 2000

Intelligent power provider

PN: UPCMTLS620HCAAZ01B

EAN: 6422956009724



Specifications

Capacity	2000 VA / 1200 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	176 – 280 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Power Factor	0.6 @ nominal voltage (100% load)
Input surge protection	475 Joules
Output	
Nominal Voltage	230 VAC
Accepted Voltage range	230 VAC, +/- 10% (3% tolerance accepted)
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	2-6 ms typical
Indicators type	
LCD	Standby mode, AC mode Overload mode, Battery mode Self-Test mode Battery replacement mode Fault Mode
Alarm	Battery mode, Overload mode, Battery replacement, Fault mode
Protection	
Outlets type	4 x Schuko Battery Backup RJ11/RJ45 Phone and network protection with 1Gb/s
Full protection	Over/Under voltage protection, discharge and overcharge protection, surge protection
Environment	
Noise level	Less than 45dB
Humidity	0-90 % (non-condensing)



HID USB
port



1Gb/s LAN
protection



Extended
back-up
time

- 1Gb/s LAN surge protection
- HID USB communication port
- Auto-Restart while AC is recovering
- Battery Replacement Alarm
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Off-Mode Charging
- Cold start function
- LCD light dimming at 20%

Battery

Battery Type & Number	2 x GP09122F (PN: BTVACIUOBTI2FAZ01B)
Typical Recharge Time	3 hours (4 hours for fully depleted batteries)
Running time on battery (minutes)	25% Load - 20min48s 50% Load - 3min44s 75% Load - 1min36s*

Management


Communication port	HID USB
Software	https://www.power-software-download.com/viewpower.html

Physical

Product dimensions	390 x 146 x 205 mm
Product weight	11.8 kg
Retail pack dimensions	496 x 236 x 297 mm
Retail pack Weight	13.2 kg



Running time on battery

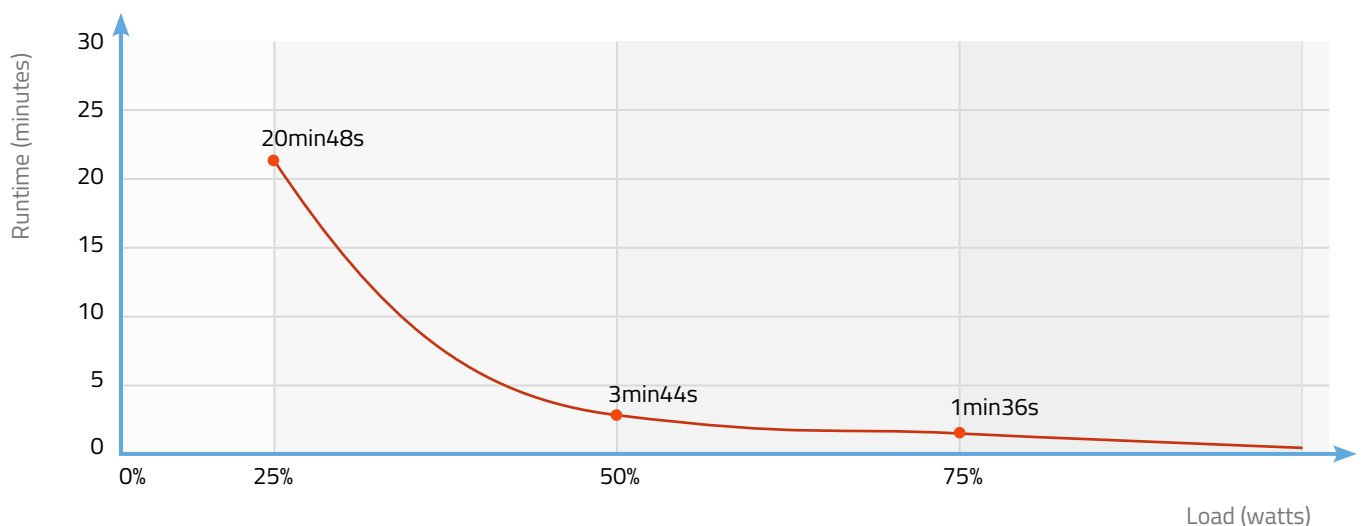

Logistics

Carton Box Size (LxWxH)	496 x 236 x 297 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	NW: 11.8 kg / GW: 13.2 kg



Certificates

RoHS 2011/65/EU



* for a decent backup time we recommend to load the ups up to 75% of its maximum capacity



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda nJoy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/njoy-cadu-2000-1200-upcmtls620hcaaz01b-ups-uredjaj-akcija-cena/>