

## Informacije o proizvodu (EN)

nJoy Cadu 650 360W UPCMTLS665TCAAZ01B UPS uređaj



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/njoy-cadu-650-360w-upcmtls665tcaaz01b-ups-uredjaj-akcija-cena/>

# Cadu 650

Intelligent power provider

PN: UPCMTLS665TCAAZ01B

EAN: 6422956006273

## Specifications

<b>Capacity</b>	600 VA / 360 W
<b>Type</b>	Line-Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	176 ~ 280 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Power Factor	0.6 @ nominal voltage (100% load)
Input surge protection	475 Joules
<b>Output</b>	
Nominal Voltage	230 VAC
Accepted Voltage range	230 VAC, +/- 10% (3% tolerance accepted)
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	2-6 ms typical
<b>Indicators type</b>	
LCD	Standby mode, AC mode Overload mode, Battery mode Self-Test mode Battery replacement mode Fault Mode
Alarm	Battery mode, Overload mode, Battery replacement, Fault mode
<b>Protection</b>	
Outlets type	2 x Schuko Battery Backup RJ11/RJ45 Phone and network protection with 1Gb/s
Full protection	Over/Under voltage protection, discharge and overcharge protection, surge protection
<b>Environment</b>	
Noise level	Less than 40dB
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



HID USB port



1Gb/s LAN protection



Extended back-up time

- 1Gb/s LAN surge protection
- HID USB communication port
- Auto-Restart while AC is recovering
- Battery Replacement Alarm
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Off-Mode Charging
- Cold start function
- LCD light dimming at 20%

## Battery

Battery Type & Number	1 x GP07122F (PN: BTVACGUOBTA2FAZ01B)
Typical Recharge Time	3 hours (4 hours for fully depleted batteries)
Running time on battery (minutes)	25% Load - 18min23s 50% Load - 6 min 75% Load - 40s*

## Management


Communication port	HID USB
Software	<a href="https://www.power-software-download.com/viewpower.html">https://www.power-software-download.com/viewpower.html</a>

## Physical

Product dimensions	287 x 100 x 142 mm
Product weight	4.4 kg
Retail pack dimensions	347 x 143 x 223 mm
Retail pack Weight	4.7 kg



## Running time on battery

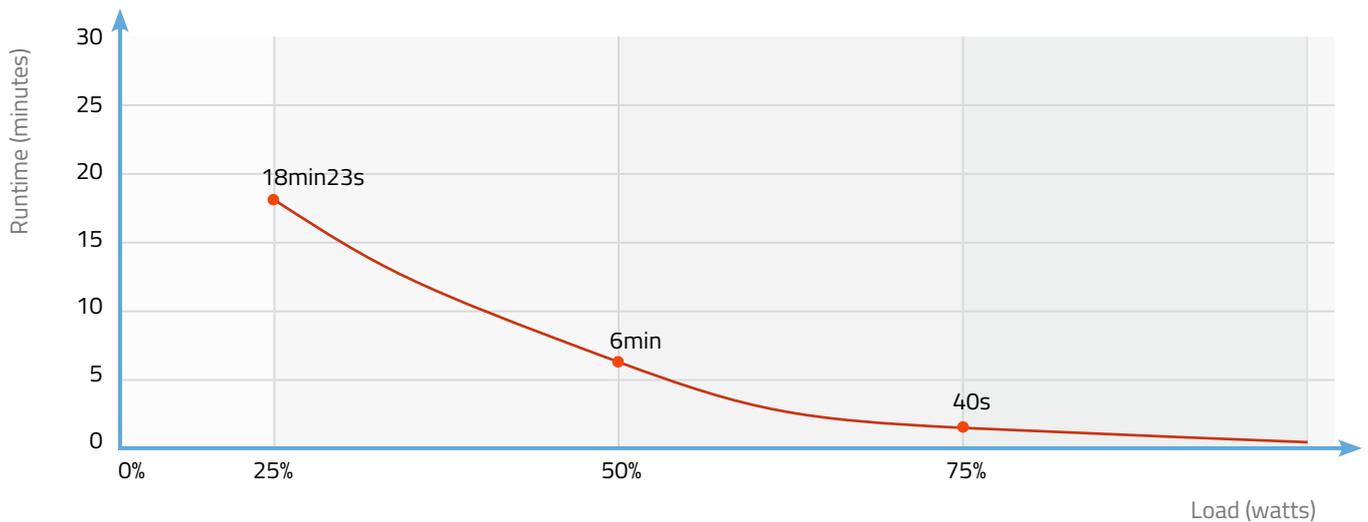

## Logistics

Carton Box Size (LxWxH)	600 x 350 x 250 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	NW: 18.8 kg / GW: 19.8 kg



## Certificates

RoHS  
2011/65/EU



\* for a decent backup time we recommend to load the ups up to 75% of its maximum capacity



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda nJoy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/njoy-cadu-650-360w-upcmtls665tcaaz01b-ups-uredjaj-akcija-cena/>