

Informacije o proizvodu (EN)

nJoy Echo Pro 3000 2400W (UPOL-OL300EP-CG01) UPS uređaj



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/njoy-echo-pro-3000-2400w-upol-ol300ep-cg01-ups-uredjaj-akcija-cena/>

Echo Pro 3000

Innovation is soundly protected

PN: UPOL-OL300EP-CG01B
EAN: 6422956009489

Specifications

Capacity	3000 VA / 2400 W
Type	On-line
Input	
Nominal Voltage	220-240 VAC
Accepted Voltage Range	80 - 300 VAC
Nominal frequency	50Hz / 60 Hz - user selectable
Frequency Range	40 ~ 70 Hz
Input surge protection	565 Joules
Power Factor	≥ 0.99 @ nominal voltage (100% load)
Output	
Nominal Voltage	208/220/230/240 VAC – user selectable
AC Voltage Regulation (Batt. Mode)	± 1%
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 0.5 Hz
Current Crest Ratio	3:1
Harmonic Distortion	≤ 3 % THD (Linear Load) ≤ 5 % THD (Non-linear Load)
Waveform (Batt. Mode)	Pure Sinewave
Transfer time	Typical 0 ms Eco mode 4 ms
Outlets type	4 x Schuko and Hard Wiring
Overload protection	
Line mode	105%-110%, warning only (No shutdown) 110%-120%, transfer to bypass after 60s >120%, Transfer to bypass immediately
Battery mode	105%-110%, warning only (No shutdown) 110%-120%, shutdown after 10s >120%, shutdown immediately
Bypass mode	110%-130%, warning only >130%, shutdown immediately



4 x Schuko outlets and Hard Wiring



ECO Mode for Energy Saving



Pure sine wave output

- Online (double conversion)
- Pure sine wave output
- Wide Input Range (80V-300V)
- Up to 96% Efficiency Rates
- Software management
- HID USB, RS2322, SNMP port communication
- Generator Compatible
- Auto-restart
- Auto-charge
- Low noise level

Efficiency

To AC Mode	88%
To Battery Mode	85%
ECO Mode	96%
LCD Display	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators

Environement

Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 40dB

Battery

Battery Type & Number	6 x GP07122F PN: BTVACGUOBT2FCN01B
Typical Recharge Time	4 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 18 min 50% Load - 7 min 75% Load - 2 min 100% Load - 1 min



Management


Connection ports	HID USB, RS232, EPO, SNMP
Software	http://www.powermonitor.software/#PowerGuideSoftware

Physical

Product dimensions	416 x 196 x 342 mm
Product weight	21.3 kg
Retail Pack Dimensions	519 x 295 x 458 mm
Retail Pack Weight	22.1 kg



Running time on battery

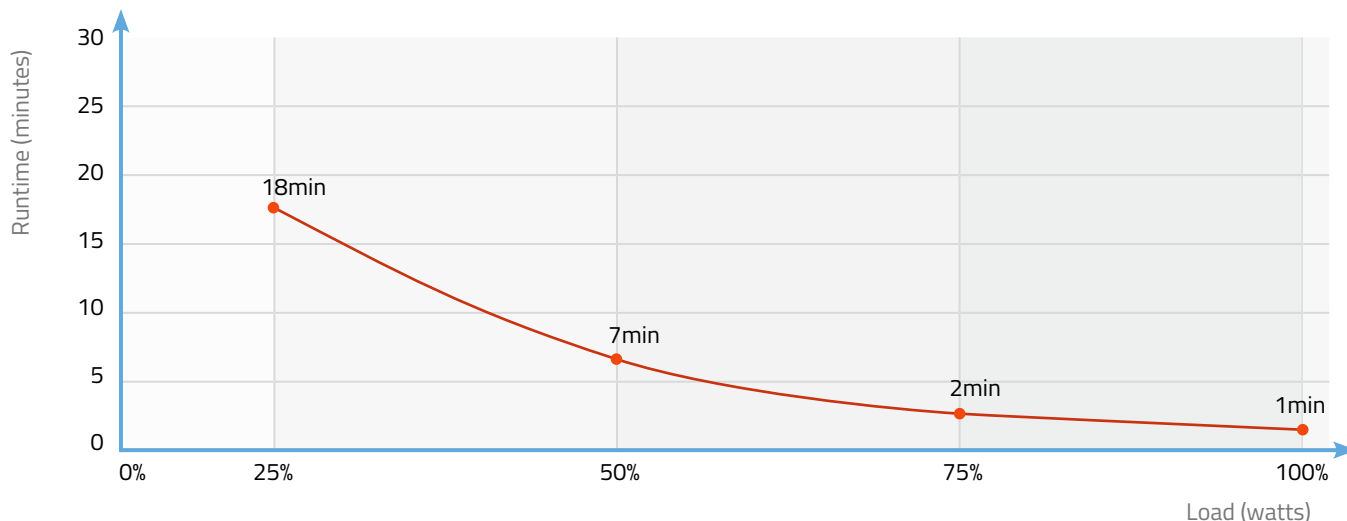

Logistics

Carton Box Size (LxWxH)	519 x 295 x 458 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 21.3 kg / G.W.: 22.1 kg



Certificates

RoHS **CE**
2011/65/EU



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda nJoy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/njoy-echo-pro-3000-2400w-upol-ol300ep-cg01-ups-uredjaj-akcija-cena/>