

Informacije o proizvodu (EN)

D-LINK DES-1005D switch

D-Link



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/d-link-des-1005d-switch-akcija-cena/>



5-PORT 10/100 SWITCH

SILENT OPERATION

Fanless design provides noise-free operation

PLUG AND PLAY

Auto MDI/MDIX simplifies cable connections

COMPACT DESIGN

Stylish, compact design allows switch to be placed anywhere



AUTO-SENSING 10/100 PORTS

The DES-1005D uses auto-sensing 10/100 Mbps ports, allowing a small workgroup to flexibly connect to Ethernet and Fast Ethernet devices to create an integrated network. These ports detect the network speed and auto-negotiate between 10BASE-T and 100BASE-TX, as well as between full and half-duplex, allowing you to get the maximum speed possible for each device connected to your network.

AUTO MDI/MDIX CROSSOVER


All ports support automatic MDI/MDIX crossover, eliminating the need for crossover cables or uplink ports. Each port can be plugged directly to a server, hub, router, or switch using regular straight-through twisted-pair Ethernet cables.

FLOW CONTROL FOR SECURE TRANSMISSION

802.3x flow control on each port minimizes dropped packets when the port's receiving buffer is full. This gives you a more reliable connection for all of your connected devices.

WHAT THIS PRODUCT DOES


The DES-1005D 5-port 10/100 Mbps Switch is a 5-port 10/100 Mbps Fast Ethernet switch that allows you to quickly set up a wired network. Connect the DES-1005D to multiple computers together to share files and folders, or connect it to a router to share an Internet connection.

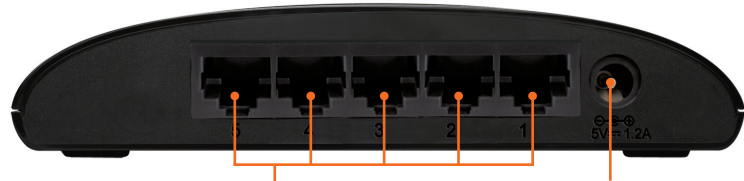

5 RJ-45 10/100 BASE-TX PORTS
Connects to computers, print servers, or network storage

POWER CONNECTOR
Connects to external power adapter

YOUR NETWORK SETUP

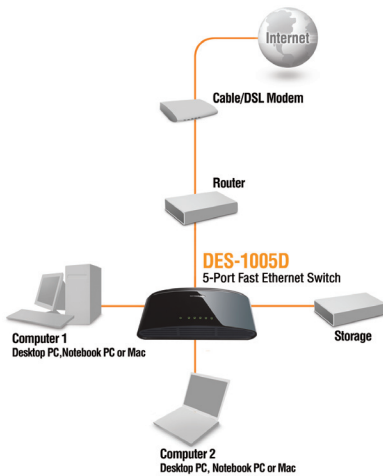

TECHNICAL SPECIFICATIONS

KEY FEATURES

- Inexpensive Fast Ethernet solution for Home/SOHO
- 5 10/100 Mbps Fast Ethernet ports
- Auto MDI/MDIX crossover for all ports
- Store-and-forward switching scheme
- Full/half-duplex for Ethernet/Fast Ethernet speeds
- IEEE 802.3x Flow Control
- Plug-and-play installation
- RoHS compliant

SWITCHING FABRIC

- 1.0 Gbps switching fabric

STANDARDS

- IEEE 802.3 10BASE-T Ethernet (twisted-pair copper)
- IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper)
- ANSI/IEEE 802.3 NWay auto-negotiation
- IEEE 802.3x flow control

PROTOCOL

- CSMA/CD

DATA TRANSFER RATES

- Ethernet:
 - 10 Mbps (half duplex)
 - 20 Mbps (full duplex)
- Fast Ethernet:
 - 100 Mbps (half duplex)
 - 200 Mbps (full duplex)

TOPOLOGY

- Star

MEDIA INTERFACE EXCHANGE

- Auto MDI/MDIX adjustment for all ports

NETWORK CABLES

- 10BASE-T:
 - UTP CAT 3/4/5/5e (100 m max.)
 - EIA/TIA-568 100-ohm STP (100 m max.)
- 100BASE-TX:
 - UTP CAT 5/5e (100 m max.)
 - EIA/TIA-568 100-ohm STP (100 m max.)

LED INDICATORS

- Per port:
 - Link/Activity
- Per device:
 - Power

TRANSMISSION METHOD

- Store-and-forward

MAC ADDRESS TABLE

- 2K entries per device

MAC ADDRESS LEARNING

- Automatic update

PACKET FILTERING/FORWARDING RATES

- Ethernet: 14,880 pps per port
- Fast Ethernet: 148,800 pps per port

RAM BUFFER

- 64 KBytes per device

DC INPUT

- External 5V/1.2A power adapter

POWER CONSUMPTION

- Power On (Standby):
 - DC input: 0.6 watts
 - AC input: 1.8 watts
- Maximum:
 - DC input: 1.9 watts
 - AC input: 3.8 watts

HEAT DISSIPATION

- Power On (Standby):
 - AC input: 6.138 BTU/h
- Maximum:
 - AC input: 12.958 BTU/h

OPERATING TEMPERATURE

- 0 to 50 °C (32 to 122 °F)

STORAGE TEMPERATURE

- -10 to 70 °C (14 to 158 °F)

OPERATING HUMIDITY

- 10% to 90% RH non-condensing

STORAGE HUMIDITY

- 5% to 90% RH non-condensing

DEVICE DIMENSIONS (W x D x H)

- 125.3 x 83.4 x 29.1 mm
(5.0 x 3.3 x 1.2 inches)

CERTIFICATIONS

- FCC Class B
- ICES-003 Class B
- CE Class B
- C-Tick Class B
- VCCI Class B
- cUL
- CB



D-Link Corporation
No. 289 Xinhu 3rd Road, Neihu, Taipei 114, Taiwan
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2010 D-Link Corporation. All rights reserved.
Release 08 (May 2010)

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda D-Link, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/d-link-des-1005d-switch-akcija-cena/>