

## Informacije o proizvodu (EN)

CUDY GS1008PS2 8-Port Gigabit PoE+ switch

cudy



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:


<https://tehnoteka.rs/p/cudy-gs1008ps2-8-port-gigabit-poe-switch-akcija-cena/>



Model

# GS 1008PS2

8-Port Gigabit PoE+ Switch  
with 2 Gigabit SFP slots

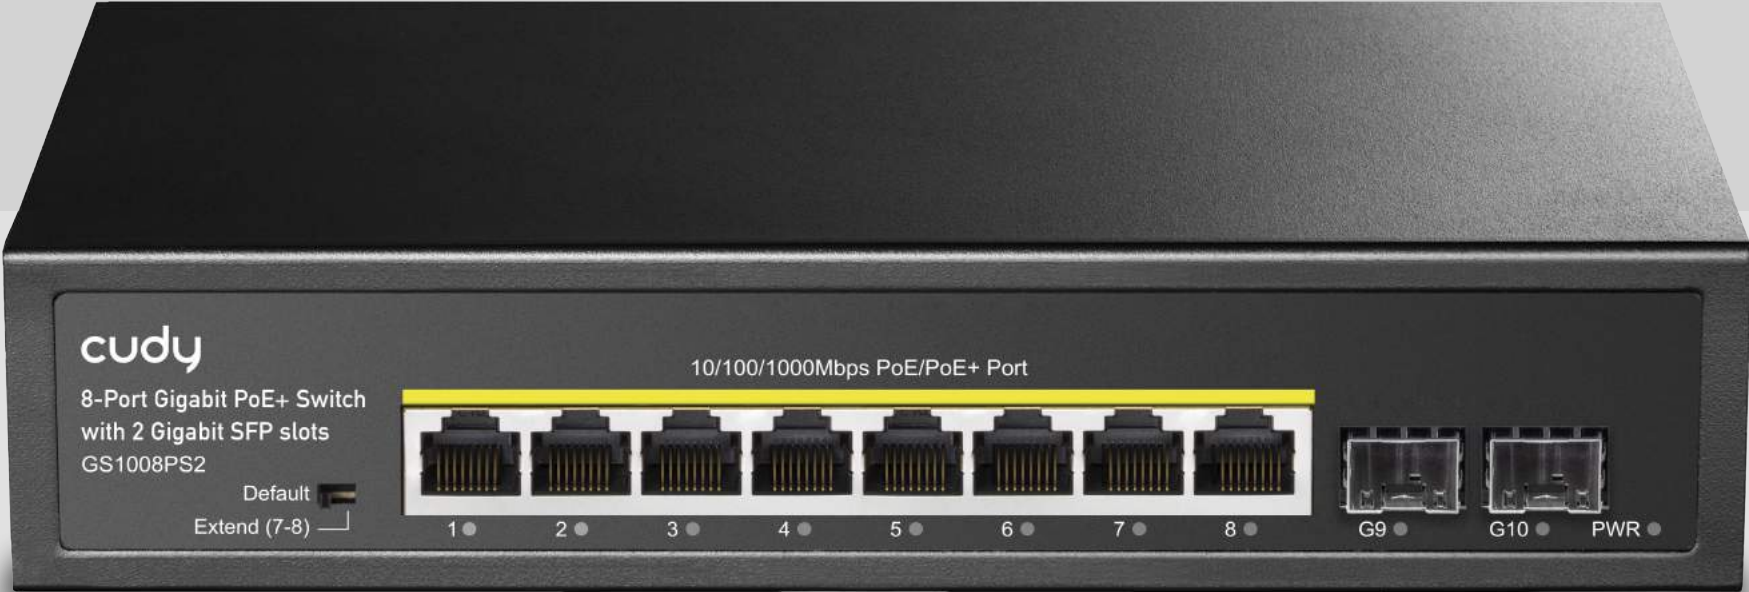

Datasheet



# Features

- Support 8\* 10/100/1000M PoE Ports+2\* Gigabit SFP Ports;
- Ethernet Ports support 10/100/1000M self-adaptive;
- The AI mode is automatically enabled 10M speed for Ports 7-8 in Extend mode;
- Flow control mode: IEEE 802.3X standard for full duplex, and Back Pressure standard for half duplex;
- Zero configuration feature, automatically supplied to adaptive equipment;
- Panel indicator monitoring status and help failure analysis;
- With DIP switch, support Default and Extend modes;
- Support Surge protection: Common mode 4KV; ESD: Air 8KV, Contact 6KV.

# Specifications

Power	Input: AC 100-240V, 50/60Hz
Ethernet	8 Gigabit PoE Ports
	2 Gigabit SFP Ports
Bandwidth	20Gbps
Throughput	14.88Mpps
Memory cache	448Kb
MAC Address	2K
Jumbo Frame	9216 Kbytes
Transfer Mode	Store and forward
MTBF	100000 hour
Network protocol	IEEE802.3 (10Base-T)
	IEEE802.3u (100Base-TX)
	IEEE802.3ab(1000Base-TX)
	IEEE802.3z(1000Base-FX)
PoE Protocol	IEEE802.3x (Flow control)
	IEEE802.3af (15.4W)
	IEEE802.3at (30W)
Network Medium	10Base-T : Cat3、4、5 or above UTP(≤100m)
	100Base-TX : Cat5 or above UTP(≤100m)
	1000Base-TX : Cat5 or above UTP(≤100m)



<b>Optical Media</b>	Multimode optical fiber: 50/125, 62.5/125, 100/140um Single-mode optical fiber: 8/125, 8.7/125, 9/125, 10/125um
<b>Working Environment</b>	Working Temperature: -10~50°C Storage Temperature: -40~70°C Working Humidity : 10%~90%, non-condensing Storage Temperature: 5%~90%, non-condensing
<b>LED Indicators</b>	PWR (Power), 1-10 Green Light (Link&Data)
<b>PWR</b>	On: Powered on Off: Powered off
<b>1-10 Green Light</b>	On: Link normal Off: Link blocked Flashing: Data transmitting
<b>DIP Switch</b>	Default: common mode, all interfaces can communicate with each other, the transmission distance is less than 100 meters, the transmission rate is 10/100/1000M adaptive; The port AI mode is disabled Extend: Link extension mode, 7-8 ports force 10M, link 250M (enable POE watchdog)

## Specifications

<b>Structure Size</b>	Product Dimension (L*W*H): 220*161*44mm Package Dimension (L*W*H): 315*215*85mm N.W: 0.88kg G.W: 1.38kg
<b>Packing Info</b>	Carton MEAS: 445*445*335mm Packing Qty: 10 units Packing Weight: 14.8KG
<b>Power Voltage</b>	Input Voltage : AC 100-240 V Power supply: 52V2.3A
<b>Package List</b>	Switch 1 pcs, Power cord 1 pcs, User manual 1 pcs,

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Cudy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/cudy-gs1008ps2-8-port-gigabit-poe-switch-akcija-cena/>