

Informacije o proizvodu (EN)

D-LINK DGS-1210-24P switch

The D-Link logo is displayed in a bold, blue, sans-serif font.

Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/d-link-dgs-1210-24p-switch-akcija-cena/>

Highlights

Easy Management


A multilingual Web UI, a compact CLI, and a variety of management features allow the switches to integrate with your existing network

IPv6 Ready

IPv6 compliance means that the switches are ready to meet future addressing standards, and are compatible with both your IPv4 and IPv6 network

Power over Ethernet

Increased PoE capability and support for IEEE 802.3af/at allow the PoE models in the series to power more devices with greater port density

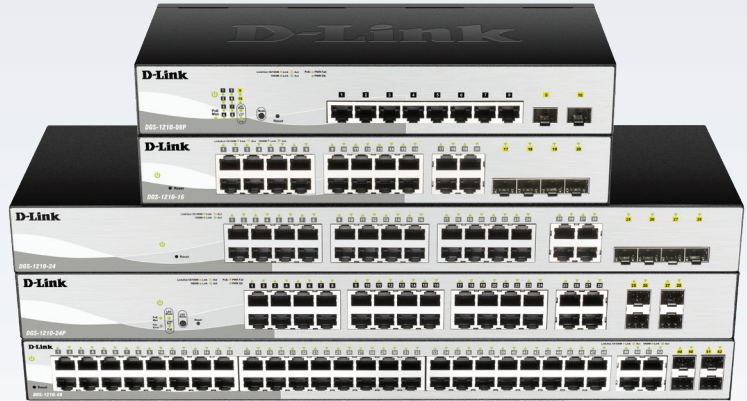

DGS-1210 Series

Smart Managed Switches

Features

Green Technology

- Link status detection
- Port shut-off
- System hibernation
- Time-based PoE (PoE models only)

Security Features

- Access Control Lists (ACLs)
- D-Link Safeguard Engine helps the CPU resist broadcast/multicast/unicast flooding
- Port Security supports up to 64 MAC addresses per port
- ARP Spoofing Prevention
- Smart Binding

Intuitive Management

- D-Link multi-lingual Web UI
- Built-in SNMP MIB for remote NMS (D-View 8)
- Compact Command Line Interface (CLI) through Telnet

Advanced Features

- Static routing
- Auto IGMP
- Surveillance Mode
- Auto Voice VLAN
- Dual configuration files
- Multiple Spanning Tree

The D-Link DGS-1210 Series Smart Managed Switches are the latest generation of switches to provide increased Power over Ethernet (PoE) output, a range of physical interface types, multiple management interfaces, and advanced Layer 2 features. With all of these features combined, the DGS-1210 Series provides a cost-efficient and flexible solution for expanding any business network.

Seamless Integration

The DGS-1210 Series includes a wide range of port and media types, including 10/100/1000BASE-T RJ-45 ports, 100/1000 Mbps combo ports, and 100/1000 Mbps SFP ports. The DGS-1210-08P features two 100/1000 Mbps SFP ports, while all other DGS-1210 Series models feature four GbE/SFP combo ports, allowing you to choose the most suitable media type for your requirements. All DGS-1210 Series PoE switches support IEEE 802.3af/at, enabling numerous PoE devices to be powered by the switch and allowing installation in remote locations without the immediate need for access to power outlets.

Advanced Features

The DGS-1210 Series comes equipped with a complete lineup of L2 features, including IGMP snooping, port mirroring, Multiple Spanning Tree Protocol (MSTP), and Link Aggregation Control Protocol (LACP). The IEEE 802.3x Flow Control function allows servers to directly connect to the switch for fast, reliable data transfers. The DGS-1210 Series also supports advanced features such as static routing, which allow network administrators to divide the network into VLANs, increasing network efficiency. Network maintenance features include loopback detection and cable diagnostics. Loopback detection significantly speeds up troubleshooting by automatically detecting and shutting down switching loops. The cable diagnostics feature, designed primarily for administrators and customer service representatives, determines the cable quality and quickly discovers errors, allowing for hassle-free diagnostics and maintenance.

DGS-1210 Series Smart Managed Switches

Automatic Configuration

The DGS-1210 Series supports Auto Voice VLAN and Surveillance Mode, which allows voice and video traffic to be automatically identified and handled differently than regular network traffic. Auto Voice VLAN detects Voice over IP (VoIP) traffic and automatically segments it from the rest of the network, adding a layer of isolation and allowing Quality of Service (QoS) to be applied. Surveillance Mode detects compatible ONVIF cameras and places them in a surveillance VLAN, allowing a single switch to be used for voice, video, and data, removing the need for dedicated hardware and reducing maintenance costs. Surveillance Mode also includes its own Web UI, making surveillance features easily accessible and simplifying management of your surveillance network.

Advanced Access Control


D-Link's innovative Safeguard Engine helps to protect the switches against traffic flooding caused by malicious attacks. The DGS-1210 Series supports 802.1X port-based authentication, allowing the clients to be authenticated through external RADIUS servers. The Access Control List (ACL) feature helps to enhance network security and helps to protect the internal IT network. The DGS-1210 Series also features Address Resolution Protocol (ARP) spoofing prevention, which helps to provide protection from attacks on the network that could allow an intruder to sniff data frames, modify traffic, or bring traffic to a halt altogether by sending fake ARP messages. To help prevent ARP spoofing attacks, the switch uses packet control ACLs to block invalid packets that contain fake ARP messages. The DHCP server screening feature filters DHCP replies on unauthorized ports to prevent them from being assigned an IP address.

Versatile Management

The DGS-1210 Series supports various management tools to adapt to users' different needs. D-Link Network Controller (DNC) and D-Link Network Hub (DNH) can discover multiple D-Link devices and allow you to manage and configure the settings of the discovered devices. The DGS-1210 Series also supports D-View 8 and Command Line Interface (CLI) through Telnet. D-View 8 is a network management system that allows for the central management of network assets, remote configuration, and logging functions.

DGS-1210 Series Smart Managed Switches

Surveillance Topology Web Interface Screenshot

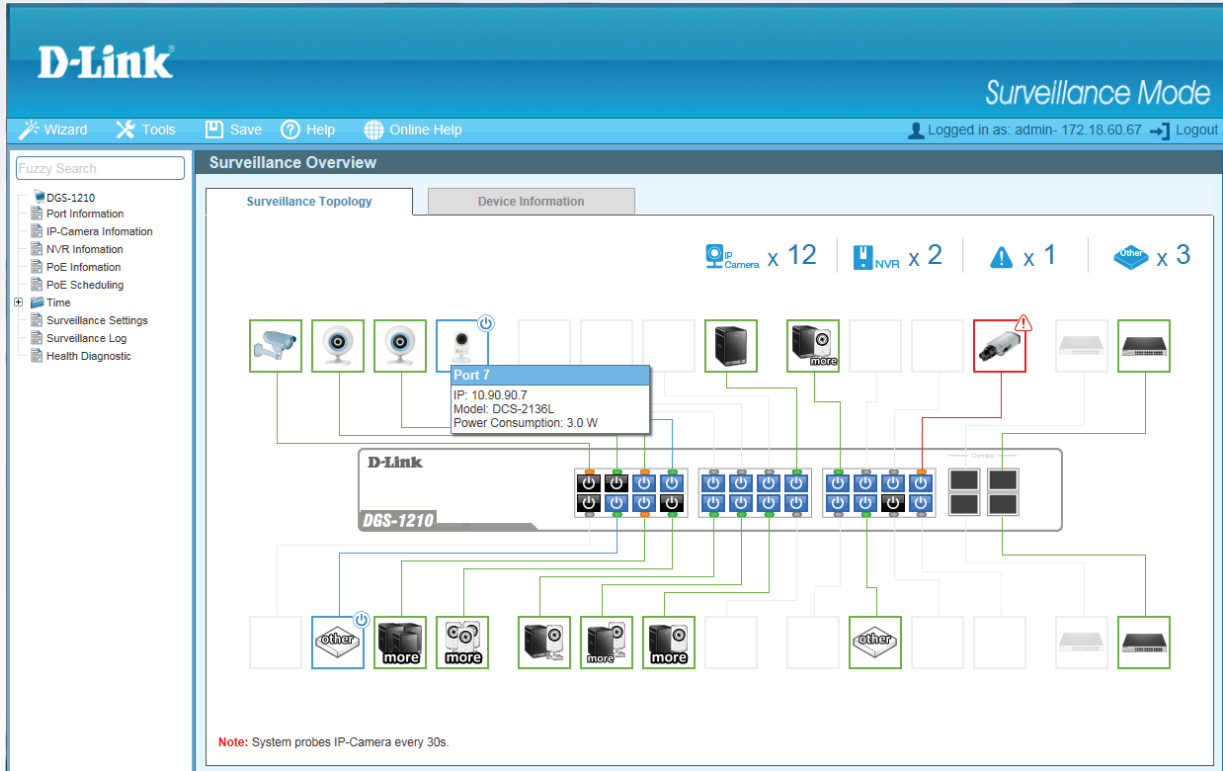

DGS-1210 Series Smart Managed Switches

Technical Specifications			
Model Number	• DGS-1210-16	• DGS-1210-24	• DGS-1210-48
Hardware Version	• Gx		
Mounting Options	• Desktop or 19" Rack Mount (mounting brackets included)		
General			
Interfaces	• 16 x 10/100/1000BASE-T ports • 4 x 100/1000 Mbps GbE/SFP combo ports	• 24 x 10/100/1000BASE-T ports • 4 x 100/1000 Mbps GbE/SFP combo ports	• 48 x 10/100/1000BASE-T ports • 4 x 100/1000 Mbps GbE/SFP combo ports
Port Standards	<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T Ethernet (twisted-pair copper) • IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper) • IEEE 802.3u 100BASE-FX 100 Mbps over fiber optic • IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper) • IEEE 802.3z 1000BASE-X 1 Gbps over fiber optic • IEEE 802.3az Energy Efficient Ethernet (EEE) • IEEE 802.3x Flow Control 		
Network Cables	• UTP Cat. 5, Cat. 5e (100 m max.)		
Duplex Mode	<ul style="list-style-type: none"> • Full/Half-duplex for 10/100 Mbps • Full-duplex for 1000 Mbps 		
Media Interface Exchange	• Auto MDI/MDIX adjustment for all twisted-pair ports		
Performance			
Switching Capacity	• 40 Gbps	• 56 Gbps	• 104 Gbps
Transmission Method	• Store-and-forward		
MAC Address Table	• 8K entries	• 8K entries	• 16K entries
Static MAC Addresses	• 256 entries		
Max 64 Byte Packet Forwarding Rate	• 29.8 Mpps	• 41.7 Mpps	• 77.4 Mpps
Packet Buffer Memory	• 4.1 Mbits	• 4.1 Mbits	• 12 Mbits
CPU Memory	• DDR3 128 MB		
Flash Memory	• 32 MB		
LEDs			
Power (per device)	✓		
Link/Active/Speed (per port)	✓		
Physical/Environmental			
Power Input	• 100 to 240 V AC 50/60 Hz internal universal power supply		
Maximum Power Consumption	• 13.08 W/100 V • 13.02 W/240 V	• 17.32 W/100 V • 16.94 W/240 V	• 34.85 W/100 V • 34.2 W/240 V
Standby Power Consumption	• 5.47 W/100 V • 5.56 W/240 V	• 6.49 W/100 V • 6.55 W/240 V	• 13.7 W/100 V • 13.9 W/240 V
Acoustics	• 0 dB(A)		

DGS-1210 Series Smart Managed Switches

Heat Dissipation	<ul style="list-style-type: none"> • 44.62 BTU/hr (100V) • 44.41 BTU/hr (240V) 	<ul style="list-style-type: none"> • 59.09 BTU/hr (100V) • 57.79 BTU/hr (240V) 	<ul style="list-style-type: none"> • 118.92 BTU/hr (100V) • 116.7 BTU/hr (240V)
Operating Temperature	<ul style="list-style-type: none"> • -5 to 50°C 		
Storage Temperature	<ul style="list-style-type: none"> • -20 to 70°C 		
Operating Humidity	<ul style="list-style-type: none"> • 0% to 95% relative humidity 		
Storage Humidity	<ul style="list-style-type: none"> • 0% to 95% relative humidity 		
Dimensions (L x W x H)	<ul style="list-style-type: none"> • 280 x 180 x 44 mm (11.02 x 7.09 x 1.73 in) 	<ul style="list-style-type: none"> • 440 x 140 x 44 mm (17.32 x 5.51 x 1.73 in) 	<ul style="list-style-type: none"> • 440 x 210 x 44 mm (17.32 x 8.27 x 1.73 in)
Weight	<ul style="list-style-type: none"> • 1.75 kg (3.86 lbs) 	<ul style="list-style-type: none"> • 2.15 kg (4.74 lbs) 	<ul style="list-style-type: none"> • 3.46 kg (7.63 lbs)
Certifications	<ul style="list-style-type: none"> • EMI: CE Class A, VCCI Class A, FCC Class A, BSMI • Safety: CB, UL, BSMI, LVD 		
MTBF	<ul style="list-style-type: none"> • 1,087,100 hours 	<ul style="list-style-type: none"> • 992,594 hours 	<ul style="list-style-type: none"> • 400,667 hours

DGS-1210 Series Smart Managed Switches

Technical Specifications		
Model	• DGS-1210-08P	• DGS-1210-24P
Hardware Version	• Gx	
Mounting Options	• Desktop or 19" Rack Mount (mounting brackets included)	
General		
Interfaces	• 8 x 10/100/1000BASE-T PoE ports • 2 x 100/1000 Mbps SFP ports	• 24 x 10/100/1000BASE-T PoE ports • 4 x 100/1000 Mbps GbE/SFP combo ports
Port Standards	<ul style="list-style-type: none"> • IEEE 802.3 10BASE-T Ethernet (twisted-pair copper) • IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper) • IEEE 802.3u 100BASE-FX 100 Mbps over fiber optic • IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper) • IEEE 802.3z 1000BASE-X 1 Gbps over fiber optic • IEEE 802.3az Energy Efficient Ethernet (EEE) <ul style="list-style-type: none"> • IEEE 802.3x Flow Control • IEEE 802.3af/at compliance (for PoE ports) 	
Network Cables	• UTP Cat. 5, Cat. 5e (100 m max.)	
Duplex Mode	<ul style="list-style-type: none"> • Full/Half-duplex for 10/100 Mbps • Full-duplex for 1000 Mbps 	
Media Interface Exchange	• Auto MDI/MDIX adjustment for all twisted-pair ports	
Performance		
Switching Capacity	• 20 Gbps	• 56 Gbps
Transmission Method	• Store-and-forward	
MAC Address Table	• 8K entries	
Static MAC Addresses	• 256 entries	
Maximum 64 Byte Packet Forwarding Rate	• 14.88 Mpps	• 41.7 Mpps
Packet Buffer Memory	• 4.1 Mbits	• 4.1 Mbits
CPU Memory	• DDR3 128 MB	
Flash Memory	• 32 MB	
PoE		
PoE Capable Ports	• Ports 1 to 8	• Ports 1 to 24
Power Budget	• 65 W	• 193 W
LEDs		
Power (per device)	✓	✓
Link/Active/Speed (per port)	✓	✓
PWR Max	✓	✓
Fan Error	• N/A	✓

DGS-1210 Series Smart Managed Switches

Physical/Environmental		
Power Input	• 54.0 V DC external power adapter	• 100 to 240 V AC 50/60 Hz internal universal power supply
Maximum Power Consumption (PoE enabled)	• 81.9 W/100 V • 80.6 W/240 V	• 263.9 W/100 V • 247.4 W/240 V
Maximum Power Consumption (PoE disabled)	• 7.6 W/100 V • 7.5 W/240 V	• 30.6 W/100 V • 28.1 W/240 V
Standby Power Consumption	• 2.5 W/100 V • 2.5 W/240 V	• 19.6 W/100 V • 16.6 W/240 V
Acoustics	• 0 dB(A)	• High speed: 51.7 dB(A) • Low speed: 44.9 dB(A)
Heat Dissipation	• 279.59 BTU/hr (100 V) • 275.04 BTU/hr (240 V)	• 900.36 BTU/hr (100 V) • 844.23 BTU/hr (240 V)
Fans	• N/A	• 2
Operating Temperature	• -5 to 50°C (23 to 122°F)	
Storage Temperature	• -20 to 70°C (-4 to 158°F)	
Operating Humidity	• 0% to 95% relative humidity	
Storage Humidity	• 0% to 95% relative humidity	
Dimensions (L x W x H)	• 280 x 126 x 44 mm (11.02 x 4.96 x 1.73 in)	• 440 x 250 x 44 mm (17.32 x 9.84 x 1.73 in)
Weight	• 0.95 kg (2.10 lbs)	• 3.75 kg (8.27 lbs)
Certifications	• EMI: CE Class A, VCCI Class A, FCC Class A, BSMI, • Safety: CB, UL, BSMI, LVD	
MTBF	• 729,258 hours	• 469,262 hours

DGS-1210 Series Smart Managed Switches

Software		
L2 Features	<ul style="list-style-type: none"> • MAC Address Table <ul style="list-style-type: none"> • 8K entries • 16K entries (DGS-1210-52/52MP only) • IGMP Snooping <ul style="list-style-type: none"> • IGMP v1/v2 Snooping • IGMP v3 awareness • Supports 256 IGMP groups • Supports at least 64 static multicast addresses • IGMP per VLAN • Auto IGMP • Supports IGMP Snooping Querier • Loopback Detection • 802.3ad Link Aggregation: <ul style="list-style-type: none"> • DGS-1210-08P: Supports a maximum of 4 groups per device and 8 ports per group • DGS-1210-24/24P: Supports a maximum of 8 groups per device and 8 ports per group • DGS-1210-48: Supports a maximum of 16 groups per device and 8 ports per group 	<ul style="list-style-type: none"> • LLDP • LLDP-MED • Jumbo Frame <ul style="list-style-type: none"> • Up to 10,000 bytes • Spanning Tree Protocol <ul style="list-style-type: none"> • 802.1D STP • 802.1W RSTP • Flow Control <ul style="list-style-type: none"> • 802.3x Flow Control • HOL Blocking Prevention • Port Mirroring <ul style="list-style-type: none"> • One-to-One • Many-to-One • Supports Mirroring for Tx/Rx/Both • Multicast Filtering <ul style="list-style-type: none"> • Forwards all unregistered groups • Filters all unregistered groups • Configurable MDI/MDIX <ul style="list-style-type: none"> • MLD snooping v1/v2 (256 groups)
VLAN	<ul style="list-style-type: none"> • 802.1Q • VLAN Group <ul style="list-style-type: none"> • Max. 256 static VLAN groups • Configurable VID from 1 - 4094 • Asymmetric VLAN 	<ul style="list-style-type: none"> • Auto Voice VLAN <ul style="list-style-type: none"> • Max. 10 user-defined OUI • Max. 8 default OUI • Auto Surveillance VLAN
Quality of Service (QoS)	<ul style="list-style-type: none"> • 802.1p Quality of Service • 8 queues per port • Queue Handling <ul style="list-style-type: none"> • Strict • Weighted Round Robin (WRR) • Bandwidth Control <ul style="list-style-type: none"> • Port-based (ingress/egress, min granularity 10/100/1000 is 16 Kbps) 	<ul style="list-style-type: none"> • QoS based on: <ul style="list-style-type: none"> • 802.1p priority queues • DSCP • MAC address • EtherType • IP address • Protocol type • ToS • IP preference • IPv6 Traffic Class • TCP/UDP port
L3 Features	<ul style="list-style-type: none"> • IP interface <ul style="list-style-type: none"> • Supports 4 interfaces • IPv6 Neighbor Discovery (ND) 	<ul style="list-style-type: none"> • Static routing <ul style="list-style-type: none"> • 124 IPv4 static route entries • 50 IPv6 static route entries
Access Control List (ACL)	<ul style="list-style-type: none"> • Max. 50 access lists • Max. 768 rules shared by IPv4, MAC, and IPv6 • Each rule can only be associated with a single port • ACL based on <ul style="list-style-type: none"> • MAC address <ul style="list-style-type: none"> • 802.1p priority mask • VID mask • Source/destination MAC address mask • EtherType mask • IP address <ul style="list-style-type: none"> • Source/destination IP address mask • DSCP mask • Protocol type mask • TCP/UDP port number mask 	<ul style="list-style-type: none"> • IPv6 address <ul style="list-style-type: none"> • Source/destination IP address mask • DSCP mask • Protocol type mask • TCP/UDP port number mask • IPv6 traffic class mask
Security Features	<ul style="list-style-type: none"> • Broadcast/Multicast/Unicast Storm Control • D-Link Safeguard Engine • Traffic segmentation • SSH v2 • TLS v.1.2 • DoS attack prevention • 802.1X Port-based Access Control • Port Security <ul style="list-style-type: none"> • Supports up to 64 MAC addresses per port • ARP Spoofing Prevention <ul style="list-style-type: none"> • Max. 127 entries 	<ul style="list-style-type: none"> • DHCP Server Screening • IP-MAC-Port Binding (Smart Binding) <ul style="list-style-type: none"> • ARP Inspection <ul style="list-style-type: none"> • Max. 256 entries • IPv4 Inspection <ul style="list-style-type: none"> • Max. 127 entries • IPv6 Inspection <ul style="list-style-type: none"> • Max. 63 entries • DHCP Snooping <ul style="list-style-type: none"> • Max. 512 entries

DGS-1210 Series Smart Managed Switches

AAA	<ul style="list-style-type: none"> • 802.1X Authentication • Supports local/RADIUS database • Supports port-based access control • Supports EAP, OTP, TLS, TTLS, PEAP • Max. 128 entries when using local database 	<ul style="list-style-type: none"> • IPv6 RADIUS server • Support MD5 authentication
OAM	<ul style="list-style-type: none"> • Cable diagnostics 	<ul style="list-style-type: none"> • Factory reset
Management	<ul style="list-style-type: none"> • Web-based GUI • D-Link Network Assistant Utility • Compact CLI • Telnet Server • TFTP Client • Configurable MDI/MDIX • SNMP <ul style="list-style-type: none"> • Supports v1/v2c/v3 • SNMP Trap • Backup/upgrade firmware • Smart Wizard • Upload/download configuration file • BootP/DHCP Client 	<ul style="list-style-type: none"> • System Log <ul style="list-style-type: none"> • Max. 500 log entries • SNMP • ICMP v6 • IPv4/v6 Dual Stack • DHCP Auto Configuration • Time setting <ul style="list-style-type: none"> • SNTP • RMONv1 • Trusted host • Dual configuration
Green V3.0 Technology	<ul style="list-style-type: none"> • Power Saving by: <ul style="list-style-type: none"> • Link Status • Time-based PoE: PoE ports can be turned on/off by port or system through schedule 	<ul style="list-style-type: none"> • System hibernation • Port shut off • Cable length detection
MIBs	<ul style="list-style-type: none"> • RFC1212 Concise MIB Definitions • RFC1213 MIBII • RFC1215 MIB Traps Convention • RFC1493 Bridge MIB • RFC1157, RFC2573, RFC2575, RFC2576 SNMP MIB • RFC1442, RFC1901, RFC1902, RFC1903, RFC1904, RFC1905, RFC1906, RFC1907, RFC1908, RFC2578, RFC3418 SNMPv2 MIB • RFC271, RFC1757, RFC2819 RMON MIB • RFC2021 RMONv2 MIB • RFC1398, RFC1643, RFC1650, RFC2358, RFC2665 Ether-like MIB 	<ul style="list-style-type: none"> • RFC2674 802.1p MIB • Interface Group MIB • RFC2618 RADIUS Authentication Client MIB • RFC4022 MIB for TCP • RFC4113 MIB for UDP • RFC2389 MIB for Diffserv. • Private MIB • PoE MIB • DDP MIB • LLDP-MED MIB
RFC Standards	<ul style="list-style-type: none"> • RFC791 IP • RFC768 UDP • RFC793 TCP • RFC792 ICMPv4 • RFC2463, RFC4443 ICMPv6 • RFC826 ARP • RFC1321, RFC2284, RFC2865, RFC2716, RFC3580 Extensible Authentication Protocol (EAP) 	<ul style="list-style-type: none"> • RFC2573 SNMP Applications • RFC2461, RFC4861 Neighbor Discovery for IPv6 • RFC2462, RFC4862 IPv6 Stateless Address Auto-configuration (SLAAC) • RFC2464 IPv6 over Ethernet and definition • RFC4291 IPv6 Addressing Architecture • RFC2893, RFC4213 IPv4/IPv6 dual stack function

Order Information

DGS-1210-08P	8 x 10/100/1000BASE-T PoE ports and 2 x 100/1000 Mbps SFP ports
DGS-1210-16	16 x 10/100/1000Base-T ports and 4 x 100/1000 Mbps GbE/SFP combo ports
DGS-1210-24	24 x 10/100/1000BASE-T ports and 4 x 100/1000 Mbps GbE/SFP combo ports
DGS-1210--24P	24 x 10/100/1000BASE-T PoE ports and 4 x 100/1000 Mbps GbE/SFP combo ports
DGS-1210-48	48 x 10/100/1000BASE-T ports and 4 x 100/1000 Mbps GbE/SFP combo ports

DGS-1210 Series Smart Managed Switches

Optional SFP Transceivers	
DGS-712	1000BASE-T copper
DEM-302S-LX	1000BASE-LX, single-mode, 2 km
DEM-302S-BXD/BXU	Gigabit WDM transceiver, single-mode, 2 km
DEM-310GT	1000BASE-LX, single-mode, 10 km
DEM-311GT	1000BASE-SX, multi-mode, 550 m
DEM-312GT2	1000BASE-SX, multi-mode, 2 km
DEM-314GT	1000BASE-LHX, single-mode, 50 km
DEM-315GT	100BASE-ZX, single-mode, 80 km
DEM-330T/R	Gigabit WDM transceiver, single-mode 10 km
DEM-331T/R	Gigabit WDM transceiver, single-mode 40 km
DEM-210	100BASE-FX, single-mode, 15 km
DEM-211	100BASE-FX, multi-mode, 2 km
DEM-220T/R	Fast Ethernet WDM transceiver, single-mode, 20 km
D-View 8 Order Information	
<i>Part Number</i>	<i>Description</i>
DV-800S-LIC	D-View 8 Standard License
DV-800E-LIC	D-View 8 Enterprise License
DV-800SE-LIC	Upgrade License from Standard to Enterprise Edition
D-View 8 (v2.00) now offers annual maintenance service licenses for Standard and Enterprise editions, as shown below:	
DV-800MS-Y1-LIC	D-View 8 Standard Maintenance License (Y1=365 days)
DV-800MS-Y2-LIC	D-View 8 Standard Maintenance License (Y2=730 days)
DV-800MS-Y3-LIC	D-View 8 Standard Maintenance License (Y3=1095 days)
DV-800MS-Y4-LIC	D-View 8 Standard Maintenance License (Y4=1460 days)
DV-800MS-Y5-LIC	D-View 8 Standard Maintenance License (Y5=1825 days)
DV-800ME-Y1-LIC	D-View 8 Enterprise Maintenance License (Y1=365 days)
DV-800ME-Y2-LIC	D-View 8 Enterprise Maintenance License (Y2=730 days)
DV-800ME-Y3-LIC	D-View 8 Enterprise Maintenance License (Y3=1095 days)
DV-800ME-Y4-LIC	D-View 8 Enterprise Maintenance License (Y4=1460 days)
DV-800ME-Y5-LIC	D-View 8 Enterprise Maintenance License (Y5=1825 days)

DV-800MS-Yn-LIC is a maintenance license applicable to D-View 8 Standard edition, and DV-800ME-Yn-LIC is a maintenance license applicable to the Enterprise edition. The applicable annual maintenance service can only be activated after D-View 8 has been activated as Standard or Enterprise Edition.

After the first-year or annual maintenance expires, functions such as device view, topology map, firmware management, and configuration management will be limited to only 30 devices that can fully operate, and other devices cannot use these common functions.

Updated 04/17/2024

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda D-Link, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanesenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/d-link-dgs-1210-24p-switch-akcija-cena/>