

Informacije o proizvodu (EN)

CYBERPOWER VP1600EILCD UPS uređaj

CyberPower®



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.






Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/cyberpower-vp1600eilcd-ups-uredjaj-akcija-cena/>

VP700E(I)LCD/VP1000E(I)LCD
VP1200E(I)LCD/VP1600E(I)LCD



TOWER UPS WITH LCD DISPLAY FOR PROFESSIONAL USAGES



The GreenPower UPS providing reliable battery backup and data line protection with high-speed transmission for home and office

Ideal for home, office and back office applications, the Value Pro Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The products provide multifunctional LCD readout to display clear power and battery conditions. The data line protection with high-speed transmission safeguards phones, network and communication equipment against surges/spikes as well as supply 1Gbps speed to transmit data. The products' power management software achieves real-time monitoring and configuration.


SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Generator Compatible
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- LCD Status Display
- High-Speed Ethernet Data Transmission
- USB Connectivity Port
- Surge and Spike Protection
- Serial Connectivity Port
- PowerPanel Management Software

PRODUCT CALLOUTS


- 1 . Power On Indicator
- 2 . Power On/Off Switch
- 3 . LCD Display Panel
- 4 . Function Button(s)
- 5 . Battery Backup & Surge Protected Outlets
- 6 . Surge Protected Outlet(s)

- 7 . USB Port
- 8 . Serial Port
- 9 . Communication Protection Ports RJ11/RJ45
- 10 . AC Inlet
- 11 . Input Circuit Breaker

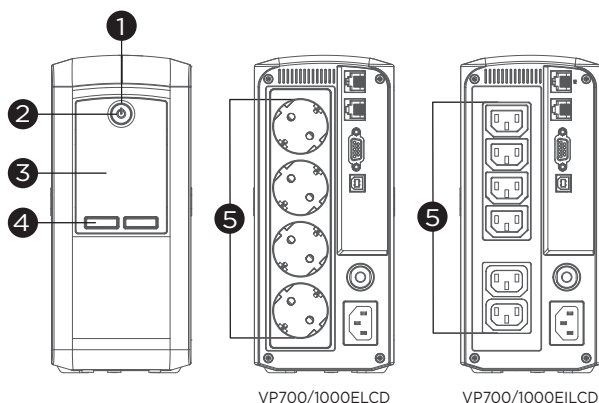


VP700/1000E(L)CD

VP700/1000E(L)CD

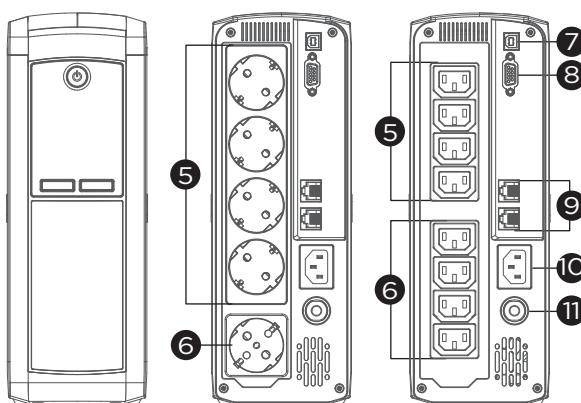

VP1200/1600E(L)CD

VP1200/1600E(L)CD





TECHNICAL SPECIFICATIONS

Model Name	VP700E(I)LCD		VP1000E(I)LCD		VP1200E(I)LCD	VP1600E(I)LCD
General						
UPS Topology	Line-interactive					
Energy Saving Technology	GreenPower UPS™ Bypass Technology					
Input						
Nominal Input Voltage (Vac)	230 ± 10%					
Input Voltage Range (Vac)	167 - 295					
Input Frequency (Hz)	50 ± 5, 60 ± 5					
Rated Input Current (A)	3.04	4.35	5.2	6.96		
Input Connector Type	IEC C14					
Output						
Capacity (VA)	700	1000	1200	1600		
Capacity (Watts)	390	550	720	960		
On Battery Waveform	Simulated Sine Wave					
On Battery Voltage(s) (Vac)	230 ± 10%					
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%					
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck					
Overload Protection	Circuit Breaker					
Outlet(s) - Total	4 [Schuko/FR] or 6 [IEC]			5 [Schuko/FR] or 8 [IEC]		
Outlet Type	Schuko x 4 or FR x 4 or IEC C13 x 6			Schuko x 5 or FR x 5 or IEC C13 x 8		
Outlet(s) - Battery & Surge Protected	4 [Schuko/FR] or 6 [IEC]			4 [Schuko/FR] or 4 [IEC]		
Outlet(s) - Surge-Only Protected	-			1 [Schuko/FR] or 4 [IEC]		
Typical Transfer Time (ms)	4					
Battery						
Runtime at Half Load (min)	10	9	12	11		
Runtime at Full Load (min)	1		4	2		
Typical Recharge Time (Hours)	8					
User-replaceable	Yes - Qualified Personnel Only					
Battery Type	Sealed Lead-acid					
Surge Protection & Filtering						
Surge Suppression (Joules)	450					
EMI/RFI Filtration	Yes					
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out					
Management & Communications						
LCD Panel	Yes					
LED Indicators	Power On					
HID Compliant USB Port(s)	1					
Serial Port	RS232					
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault					
Power Management Software	PowerPanel Personal (Recommended)					
Physical						
Form Factor	Tower					
Physical Size - UPS Module						
Dimensions (WxHxD) (mm.)	100 x 227 x 260			100 x 281 x 355		
Weight (kg.)	5.14	6.23	9.62	10.42		
Environmental						
Operating Temperature (°C)	0 - 40					
Operating Relative Humidity (Non-condensing) (%)	0 - 90					
Online Thermal Dissipation (BTU/hr)	9.5	23.9	30.7	68		
Certifications						
Certifications*	CE, EAC					
RoHS	Yes					

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Cyber Power, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/cyberpower-vp1600eilcd-ups-uredjaj-akcija-cena/>