

## Informacije o proizvodu (EN)

MIELE aspirator DAS 4620



**Miele**



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/miele-aspirator-das-4620-akcija-cena/>

DAS 4620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



- Classic design – stainless steel panel, 60 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495963 / Material number: 11862180 / Old Material Number: 28S4620SD

<b>General information</b>	
<b>Construction type</b>	
Slimline cooker hood	•
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
Active charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
<b>Design</b>	
Colour	Stainless steel
<b>User convenience</b>	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ – D)	A+++
ECO motor	•
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	23,1
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
<b>Cleaning and care</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
Number x W	1 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
<b>Fan</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	180
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	280
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	400
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	600
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	38,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	48,0

DAS 4620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



EAN: 4002516495963 / Material number: 11862180 / Old Material Number: 28S4620SD

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	66,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	42,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	53,0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	165
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	265
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	380
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	585
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	59,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	29,0
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Canopy width in mm	596
Canopy height in mm	36
Canopy depth in mm	273
Net weight in kg	12,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,09
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50


DAS 4620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



EAN: 4002516495963 / Material number: 11862180 / Old Material Number: 28S4620SD

<b>Installation notes</b>	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
<b>Accessories included</b>	
Non-return flap	•

DAS 4620  
Slimline cooker hood  
with EasySwitch controls for convenient operation

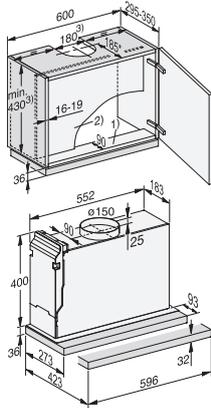

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620,  
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable. , 3) Extraction, recirculation with conversion kit DUU 150. , \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly. , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Miele, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/miele-aspirator-das-4620-akcija-cena/>