

## Informacije o proizvodu (EN)

SEAGATE hard disk 12TB Exos X24 ST12000NM002H



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.


Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/seagate-hard-disk-12tb-exos-x24-st12000nm002h-akcija-cena/>




DATA SHEET

Exos X24 — Powerful performance. Proven technology. Scalable design.

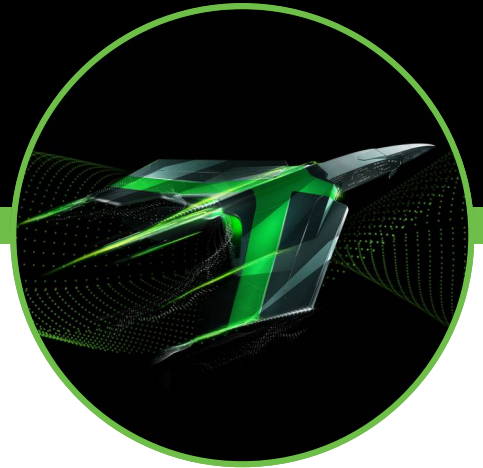

Powerful performance with proven technology — Seagate's® Exos® X24 drives are built off the platform that's shipped millions globally and deployed in leading cloud service provider solutions — making them the most sought-after drives in our datasphere. Designed with the highest rack-space efficiency and protected with Seagate

Secure™, Exos X24 offers extreme market-leading capacity, earning customer confidence by delivering trusted peace of mind.



### Best-Fit Applications

- Scalable hyperscale applications/cloud data centres
- Massive scale-out data centres
- Big data applications
- High-capacity density RAID storage
- Mainstream enterprise external storage arrays
- Distributed file systems, including Hadoop and Ceph
- Enterprise backup and restore — D2D, virtual tape
- Centralised surveillance

## Maximum Storage Capacity for Highest Rack Space Efficiency

**Market-leading 24 TB HDD** offering the highest capacity available for more petabytes per rack<sup>1</sup>

**Highly reliable performance** with enhanced caching — making it the logical choice for cloud data centre and massive scale-out data centre applications

**Hyperscale SATA model tuned for large data transfers and low latency**

**PowerBalance™** feature optimises watts per TB

**Maximise total cost of ownership savings** through lower power and weight with helium-sealed drive design

**Proven helium side-sealing weld technology** for added handling, robustness and leak protection

**Digital environmental sensors to monitor internal drive conditions for optimal operation and performance**

**Data protection and security** — featuring Seagate Instant Secure for safe, affordable, fast, and easy drive retirement

**Proven enterprise-class reliability** backed by a 5-year limited warranty and 2.5M-hr MTBF rating

<sup>1</sup> Compared to 20 TB competitive product



Specifications	SATA 6Gb/s			
Capacity	24TB	20TB	16TB	12TB
Standard Model - Seagate Instant Secure Erase (ISE) <sup>1</sup>	ST24000NM002H	ST20000NM002H	ST16000NM002H	ST12000NM002H
SED Model <sup>2</sup>	ST24000NM001H	ST20000NM001H	ST16000NM001H	ST12000NM001H
SED-FIPS <sup>2</sup>	—	—	—	—
<b>FEATURES</b>				
Helium Sealed-Drive Design	Yes	Yes	Yes	Yes
Conventional Magnetic Recording (CMR)	Yes	Yes	Yes	Yes
Super Parity	Yes	Yes	Yes	Yes
PowerChoice™ Idle Power Technology	Yes	Yes	Yes	Yes
PowerBalance™ Power/Performance Technology	Yes	Yes	Yes	Yes
Hot-Plug Support <sup>3</sup>	Yes	Yes	Yes	Yes
Cache, Multi-segmented (MB)	512	512	512	512
RSA 3072 Firmware Verification (SD&D)	Yes	Yes	Yes	Yes
<b>RELIABILITY/DATA INTEGRITY</b>				
Mean Time Between Failures (MTBF, hours)	2500000 hr	2500000 hr	2500000 hr	2500000 hr
Reliability Rating @ Full 24x7 Operation (AFR)	0.35%	0.35%	0.35%	0.35%
Non-recoverable Read Errors per Bits Read	<1 in 10E15	<1 in 10E15	<1 in 10E15	<1 in 10E15
Power-On Hours per Year (24x7)	8,760	8,760	8,760	8,760
512e Sector Size (Bytes per Sector)	512	512	512	512
4Kn Sector Size (Bytes per Sector)	4,096	4,096	4,096	4,096
Limited Warranty (years)	5	5	5	5
<b>PERFORMANCE</b>				
Spindle Speed (RPM)	7200 RPM	7200 RPM	7200 RPM	7200 RPM
Max. Sustained Transfer Rate OD (MB/s, MiB/s)	285/272	285/272	285/272	285/272
Random Read/Write 4K QD16 WCD (IOPS)	168/550	168/550	168/550	168/550
Interface Ports	Single	Single	Single	Single
Rotation Vibration @ 20-1500 Hz (rad/sec <sup>2</sup> )	12.5	12.5	12.5	12.5
<b>POWER</b>				
Idle A (W) Average	6.3	6.3	6.3	6.3
Max Operating, Random Read/Write 4K/16Q (W)	8.9, 7.1	8.9, 7.1	8.9, 7.1	8.9, 7.1
Power Supply Requirements	+12 V and +5 V	+12 V and +5 V	+12 V and +5 V	+12 V and +5 V
<b>ENVIRONMENTAL</b>				
Temperature, Operating (°C) (Ambient/Drive Reported)	5 / 60	5 / 60	5 / 60	5 / 60
Vibration, Non-operating: 2 to 500 Hz (Grms)	2.27	2.27	2.27	2.27
Shock, Operating 2 ms (Read/Write) (Gs)	40 Gs	40 Gs	40 Gs	40 Gs
Shock, Non-operating 2 ms (GS)	200	200	200	200
<b>PHYSICAL</b>				
Height (mm/in, max) <sup>4</sup>	26.1 mm/1.028 in	26.1 mm/1.028 in	26.1 mm/1.028 in	26.1 mm/1.028 in
Width (mm/in, max) <sup>4</sup>	101.85 mm/4.010 in	101.85 mm/4.010 in	101.85 mm/4.010 in	101.85 mm/4.010 in
Depth (mm/in, max) <sup>4</sup>	147 mm/5.787 in	147 mm/5.787 in	147 mm/5.787 in	147 mm/5.787 in
Weight (gm/lb)	685 g/1.51 lb	685 g/1.51 lb	685 g/1.51 lb	685 g/1.51 lb
Carton Unit Quantity	20	20	20	20
Cartons per Pallet / Cartons per Layer	40/8	40/8	40/8	40/8

<sup>1</sup> FastFormat models ship in 512e format state. When switching from 512e to 4Kn by executing the FastFormat routine, all data on the drive will be deleted. Note that data must be aligned to 4K sectors to see improved performance in 4Kn format

<sup>2</sup> Self-Encrypting Drives (SED) and FIPS 140-3 Validated drives available through franchised authorised distributors. May require TCG-compliant host or controller support.

<sup>3</sup> Supports Hotplug operation per Serial ATA Revision 3.5 specification

<sup>4</sup> These base deck dimensions conform to the Small Form Factor Standard (SFF-8301) found at <https://www.snia.org/sff>. For connector-related dimensions, see SFF-8323.



Specifications	SAS 12Gb/s			
	24TB	20TB	16TB	12TB
Capacity	24TB	20TB	16TB	12TB
Standard Model - Seagate Instant Secure Erase (ISE) <sup>1</sup>	ST24000NM007H	ST20000NM007H	ST16000NM007H	ST12000NM007H
SED Model <sup>2</sup>	ST24000NM005H	ST20000NM005H	ST16000NM005H	ST12000NM005H
SED-FIPS <sup>2</sup>	ST24000NM006H	ST20000NM006H	ST16000NM006H	ST12000NM009H
<b>FEATURES</b>				
Helium Sealed-Drive Design	Yes	Yes	Yes	Yes
Conventional Magnetic Recording (CMR)	Yes	Yes	Yes	Yes
Super Parity	Yes	Yes	Yes	Yes
PowerChoice™ Idle Power Technology	Yes	Yes	Yes	Yes
PowerBalance™ Power/Performance Technology	Yes	Yes	Yes	Yes
Hot-Plug Support <sup>3</sup>	Yes	Yes	Yes	Yes
Cache, Multi-segmented (MB)	512	512	512	512
RSA 3072 Firmware Verification (SD&D)	Yes	Yes	Yes	Yes
<b>RELIABILITY/DATA INTEGRITY</b>				
Mean Time Between Failures (MTBF, hours)	2500000 hr	2500000 hr	2500000 hr	2500000 hr
Reliability Rating @ Full 24x7 Operation (AFR)	0.35%	0.35%	0.35%	0.35%
Non-recoverable Read Errors per Bits Read	<1 in 10E15	<1 in 10E15	<1 in 10E15	<1 in 10E15
Power-On Hours per Year (24x7)	8,760	8,760	8,760	8,760
512e Sector Size (Bytes per Sector)	512, 520, 528	512, 520, 528	512, 520, 528	512, 520, 528
4Kn Sector Size (Bytes per Sector)	4,096, 4,160, 4,224	4,096, 4,160, 4,224	4,096, 4,160, 4,224	4,096, 4,160, 4,224
Limited Warranty (years)	5	5	5	5
<b>PERFORMANCE</b>				
Spindle Speed (RPM)	7200 RPM	7200 RPM	7200 RPM	7200 RPM
Max. Sustained Transfer Rate OD (MB/s, MiB/s)	285/272	285/272	285/272	285/272
Random Read/Write 4K QD16 WCD (IOPS)	168/550	168/550	168/550	168/550
Interface Ports	Dual	Dual	Dual	Dual
Rotation Vibration @ 20-1500 Hz (rad/sec <sup>2</sup> )	12.5	12.5	12.5	12.5
<b>POWER</b>				
Idle A (W) Average	6.5	6.5	6.5	6.5
Max Operating, Random Read/Write 4K/16Q (W)	9.8, 8.2	9.8, 8.2	9.8, 8.2	9.8, 8.2
Power Supply Requirements	+12 V and +5 V	+12 V and +5 V	+12 V and +5 V	+12 V and +5 V
<b>ENVIRONMENTAL</b>				
Temperature, Operating (°C) (Ambient/Drive Reported)	5 / 60	5 / 60	5 / 60	5 / 60
Vibration, Non-operating: 2 to 500 Hz (Grms)	2.27	2.27	2.27	2.27
Shock, Operating 2 ms (Read/Write) (Gs)	40 Gs	40 Gs	40 Gs	40 Gs
Shock, Non-operating 2 ms (GS)	200	200	200	200
<b>PHYSICAL</b>				
Height (mm/in, max) <sup>4</sup>	26.1 mm/1.028 in	26.1 mm/1.028 in	26.1 mm/1.028 in	26.1 mm/1.028 in
Width (mm/in, max) <sup>4</sup>	101.85 mm/4.010 in	101.85 mm/4.010 in	101.85 mm/4.010 in	101.85 mm/4.010 in
Depth (mm/in, max) <sup>4</sup>	147 mm/5.787 in	147 mm/5.787 in	147 mm/5.787 in	147 mm/5.787 in
Weight (gm/lb)	685 g/1.51 lb	685 g/1.51 lb	685 g/1.51 lb	685 g/1.51 lb
Carton Unit Quantity	20	20	20	20
Cartons per Pallet / Cartons per Layer	40/8	40/8	40/8	40/8

<sup>1</sup> FastFormat models ship in 512e format state. When switching from 512e to 4Kn by executing the FastFormat routine, all data on the drive will be deleted. Note that data must be aligned to 4K sectors to see improved performance in 4Kn format

<sup>2</sup> Self-Encrypting Drives (SED) and FIPS 140-3 Validated drives available through franchised authorised distributors. May require TCG-compliant host or controller support.

<sup>3</sup> Supports Hotplug operation per Serial ATA Revision 3.5 specification

<sup>4</sup> These base deck dimensions conform to the Small Form Factor Standard (SFF-8301) found at <https://www.snia.org/sff>. For connector-related dimensions, see SFF-8323.

© 2023 Seagate Technology LLC. All rights reserved. Seagate, Seagate Technology, and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. Exos, the Exos logo, FastFormat, PowerBalance, PowerChoice, and Seagate Secure are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners. When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Actual data rates may vary depending on operating environment and other factors, such as chosen interface and disk capacity. The export or re-export of Seagate hardware or software is regulated by the U.S. Department of Commerce, Bureau of Industry and Security (for more information, visit [www.bis.doc.gov](http://www.bis.doc.gov)), and may be controlled for export, import and use in other countries. Seagate reserves the right to change, without notice, product offerings or specifications. DS2080-2307US

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Seagate, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/seagate-hard-disk-12tb-exos-x24-st12000nm002h-akcija-cena/>