

Informacije o proizvodu (EN)

CUDY RE1200 AC1200 range extender

The logo for Cudy, featuring the word "cudy" in a lowercase, rounded, blue sans-serif font.

Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/cudy-re1200-ac1200-range-extender-akcija-cena/>





cudy



Model: RE 1200

AC1200


Dual Band Range Extender

-  2.4 GHz 300Mbps + 5 GHz 867Mbps Wi-Fi Speed
-  2-in-1 WiFi Extender / Access Point
-  WPS Quick Setup
-  Cudy Whole Home Mesh



Features

- 2.4 GHz 300Mbps+5 GHz 867Mbps Wi-Fi Speed
- Work with any standard router or gateway
- Easily expand wireless coverage at a push of the WPS button
- External antennas for faster and more reliable Wi-Fi
- 2-in-1 WiFi Extender / Access Point
- Easy Setup Assistant with multi-language support

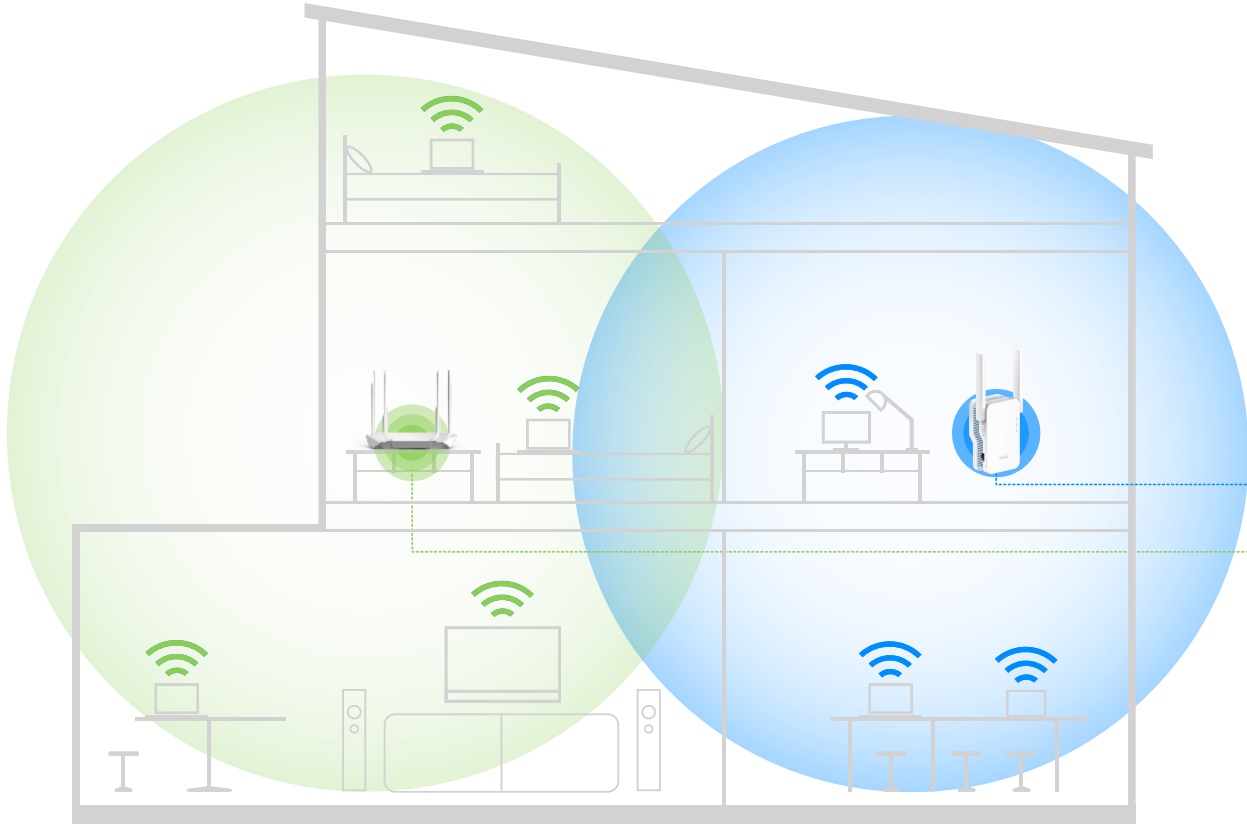

WiFi Range Extender

Boosts the range of your existing WiFi and creates a stronger signal in hard-to-reach areas


Existing WiFi

Sometimes your router does not provide the WiFi coverage you need

Wi-Fi Extender Mode





Access Point Mode

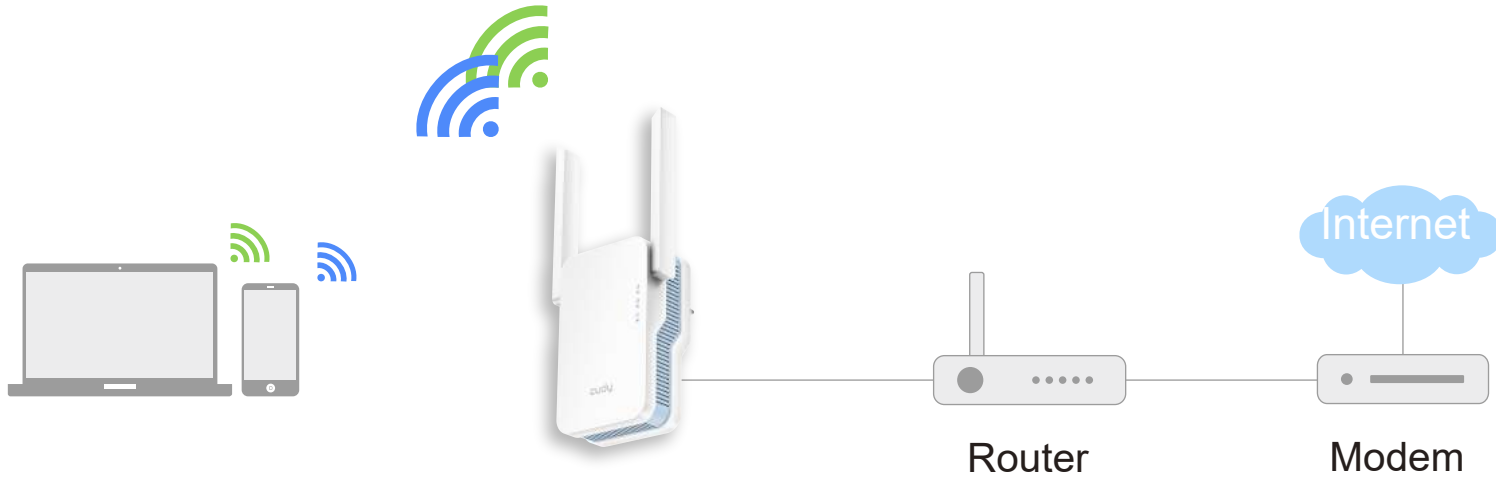




Say Goodbye to Dead Spots and Buffering

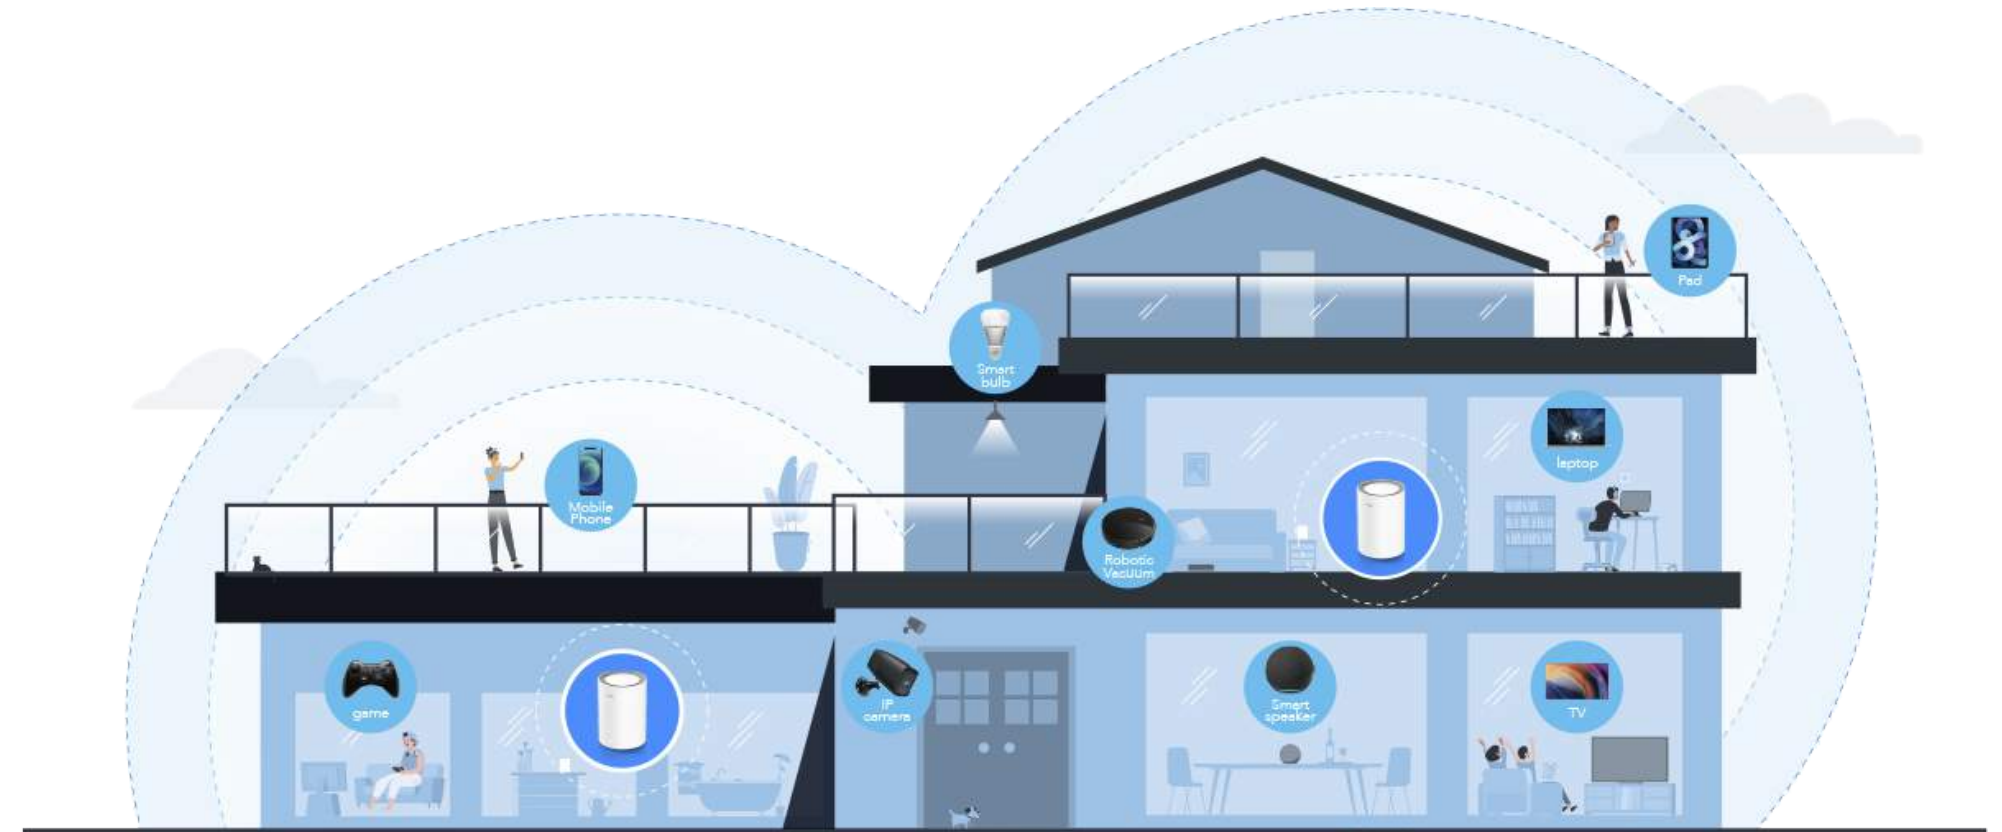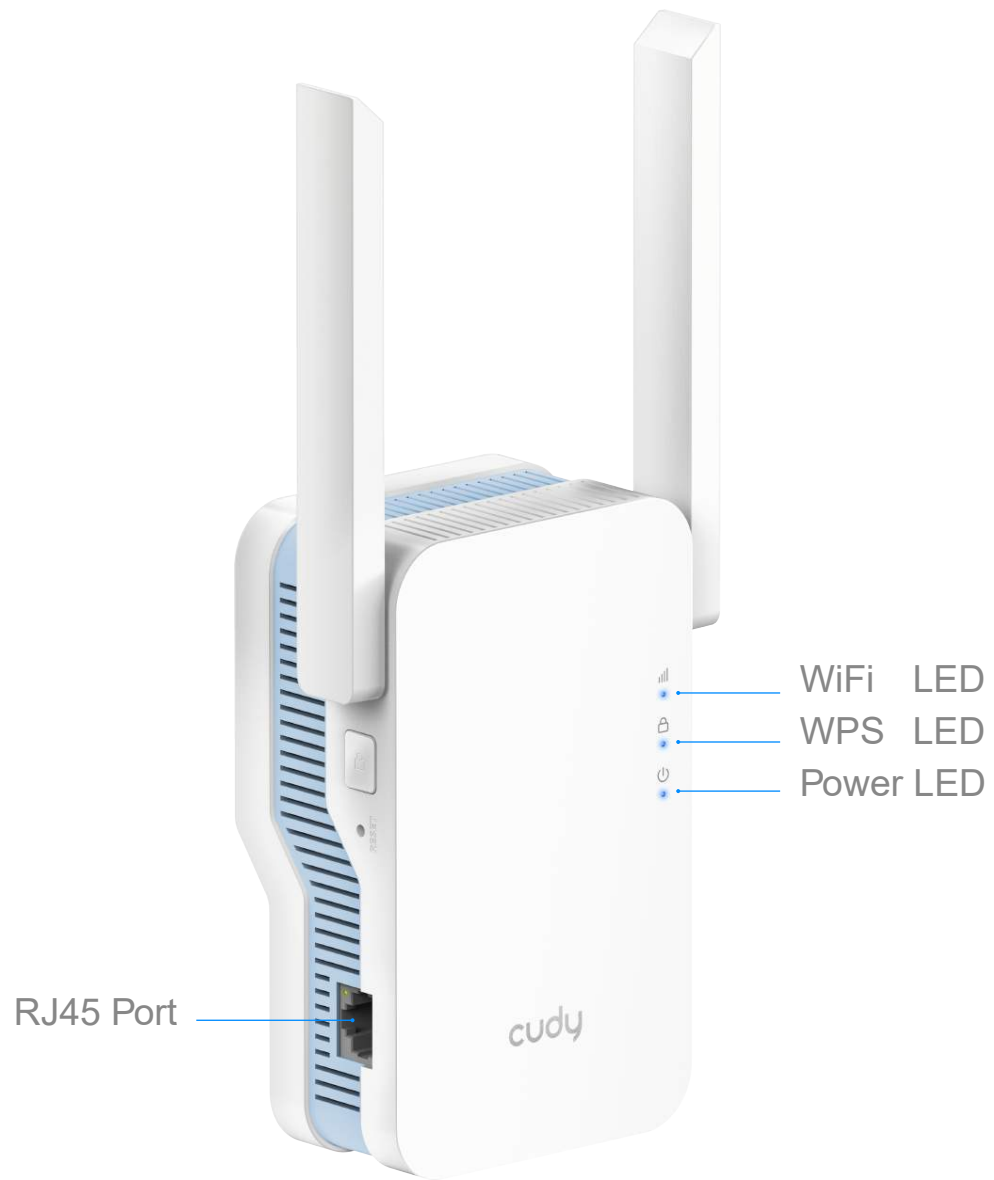

Enjoy Cudy Whole Home Mesh Wi-Fi System

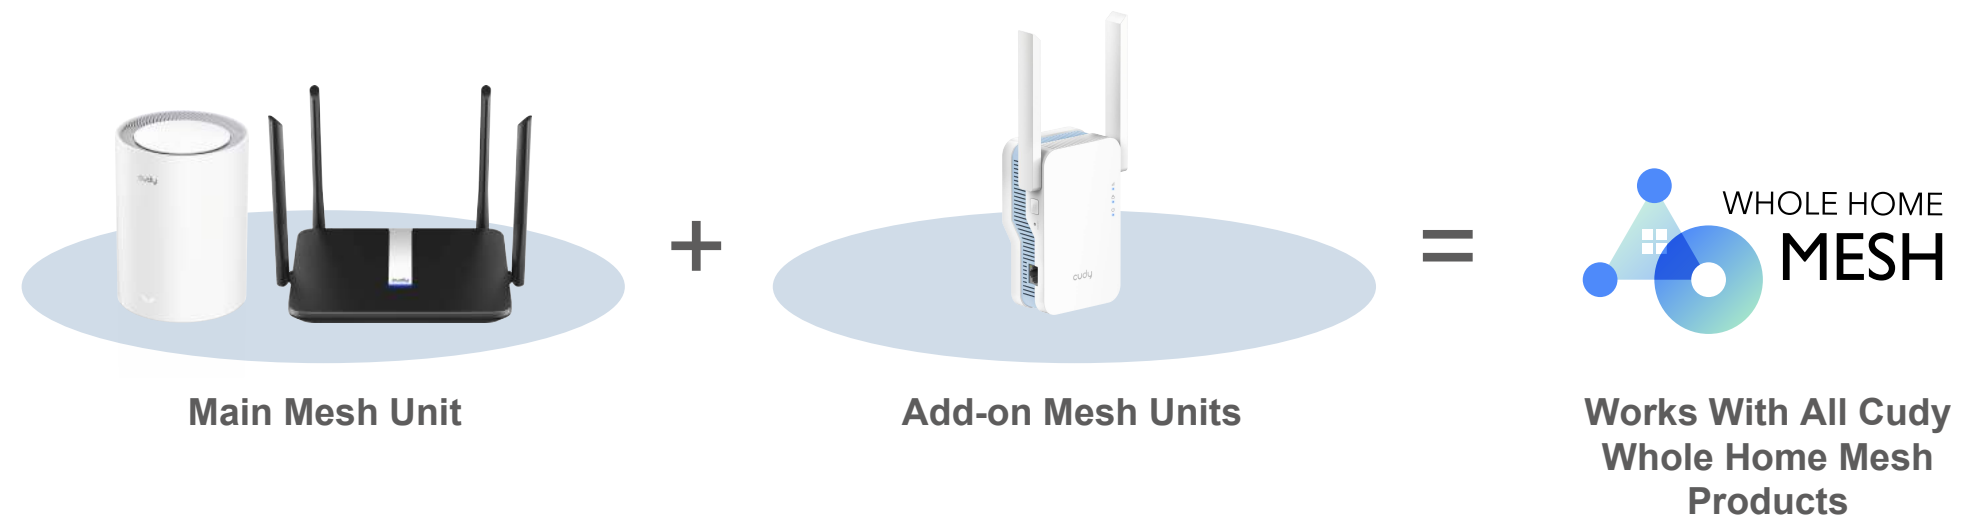


- 4K 5GHz 867Mbps
- 2.4GHz 300Mbps



Specifications

Product Name	1200Mbps Wi-Fi Range Extender
Product Model	RE1200
Standards and Protocols	IEEE 802.11ac/n/g/a/b
Frequency	2.4GHz & 5GHz
Signal Rate	5GHz: Up to 867Mbps 2.4GHz: Up to 300Mbps
Wireless Security	WPA-PSK/WPA2-PSK, OPEN
Reception Sensitivity	5GHz: 11a 6Mbps: -96dBm@10% PER 11a 54Mbps: -77dBm@10% PER 11ac HT20 mcs8: -72dBm@10% PER 11ac HT40 mcs9: -67dBm@10% PER 11ac HT80 mcs9: -62dBm@10% PER 2.4GHz: 11g 54M: -78dBm@10% PER 11n HT20 mcs7: -76dBm@10% PER 11n HT40 mcs7: -73dBm@10% PER
Ports	1 10/100Mbps self-adaptive LAN
Power	Direct plug-in power supply (110V-240V)
Antenna	2 x 5dBi Antennas
Environment	Operating Temperature: 0°C~50°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

LED and Button

LED	Colour	Status	Indication
	/	OFF	No power
	Blue	Flash	The system is booting or upgrading
		ON	System startup is complete
	/	OFF	Not connected to host Wi-Fi
	Blue	Flash	WPS in progress
		ON	Connected to host Wi-Fi
	OFF	Flash	No host Wi-Fi configuration
	Red Flash	ON	Not connected to host Wi-Fi
	Solid Red	ON	Connected to host Wi-Fi, signal is weak
	Solid Purple	ON	Connected to host Wi-Fi, signal is fair
	Solid Blue	ON	Connected to host Wi-Fi, signal is good
Reset	Long press for 2 seconds		Press and hold Reset button for 2 seconds until all the LED lights turn on and off.
WPS	Press to take effect		Press the WPS button until WPS LED start flashing.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Cudy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/cudy-re1200-ac1200-range-extender-akcija-cena/>