

Uputstvo za upotrebu (EN)

ENERGY SISTEM bluetooth zvučnik Urban Box 6 Navy portable

ENERGY  SISTEM



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/energy-sistem-bluetooth-zvucnik-urban-box-6-navy-portable-akcija-cena/>

ENGLISH

Introduction	3
Care and maintenance	3
Technical specifications	3
Audio	4
Wireless connectivity	4
TWS technology compatible with	4
Audio input	4
Power requirements	4
Battery	4
Other features	4
Product content	4
General overview	4
Switching on and off the device	5
Playback modes	6
Bluetooth® --> Audio-in	6
Playback control	6
Bluetooth® pairing	6
Sound settings	6
TWS (True Wireless Stereo)	7
Auxiliary audio input	7
Call control (hands-free function)	7
Voice Assistant	7
Charging the battery	8
Charging other devices (Power Bank function)	8
Resetting the device	8
Warranty	8
Declaration of conformity	8

ENERGY♥SISTEM



urban box 6

Manual de usuario / User manual
Manual de l'utilisateur / Manual do usuário

Introduction

- Thank you for trusting our company and buying the new *Urban Box 6*. We hope you enjoy the product.

Care and maintenance

- Do not expose your *Urban Box 6* to humidity or heat.
- Do not use neither corrosive nor abrasive cleaning products.
- Do not disassemble the device. All repair works should be carried out exclusively by qualified staff of Energy Sistem Technology, S.A.
- Make sure your *Urban Box 6* is off when you are not using it. Do not let it completely discharged for a long time.

Technical specifications

Audio

- Sound system: 2.0 stereo system
- Power: 40 W
- 2 full range speakers: 2.8", 20 W
- Passive radiators: 2 side membranes
- Frequency response: 60 Hz ~ 16 kHz
- DSP with 3 EQ modes

Wireless connectivity

- Bluetooth® 5.0 wireless technology
- Frequency band: 2.4 GHz
- Compatible Bluetooth profiles: HSP / HFP / A2DP / AVRCP
- Compatible with SBC codecs
- Up to 20 m distance range
- True Wireless Stereo (TWS) technology
- Up to 20 m distance range
- Hands-free function
- Compatible with Google/Siri voice assistant

TWS technology compatible with

- Urban Box 6

Audio input

- 3.5 mm audio-in (analogue stereo input)

Power requirements

- USB Type-C charging connector
- Power cable length: 50 cm

Battery

- Capacity: 4000 mAh
- Type: lithium-polymer battery / lithium-ion battery
- Battery life at medium volume: 12 hours*
- Charging time: 4 hours**
- Power supply: 5 V / 3 A
- Charging method: USB Type-C

- This value is approximate. The battery life depends on the selected volume and the type of music. ** This value is approximate. Charging time may vary depending on the charger used.


Other features

- 5 V, 1 A USB charging port for external devices
- IPX6 certified

Product content

- Urban Box 6
- Shoulder strap
- USB Type-C charging cable
- Quick guide

General overview

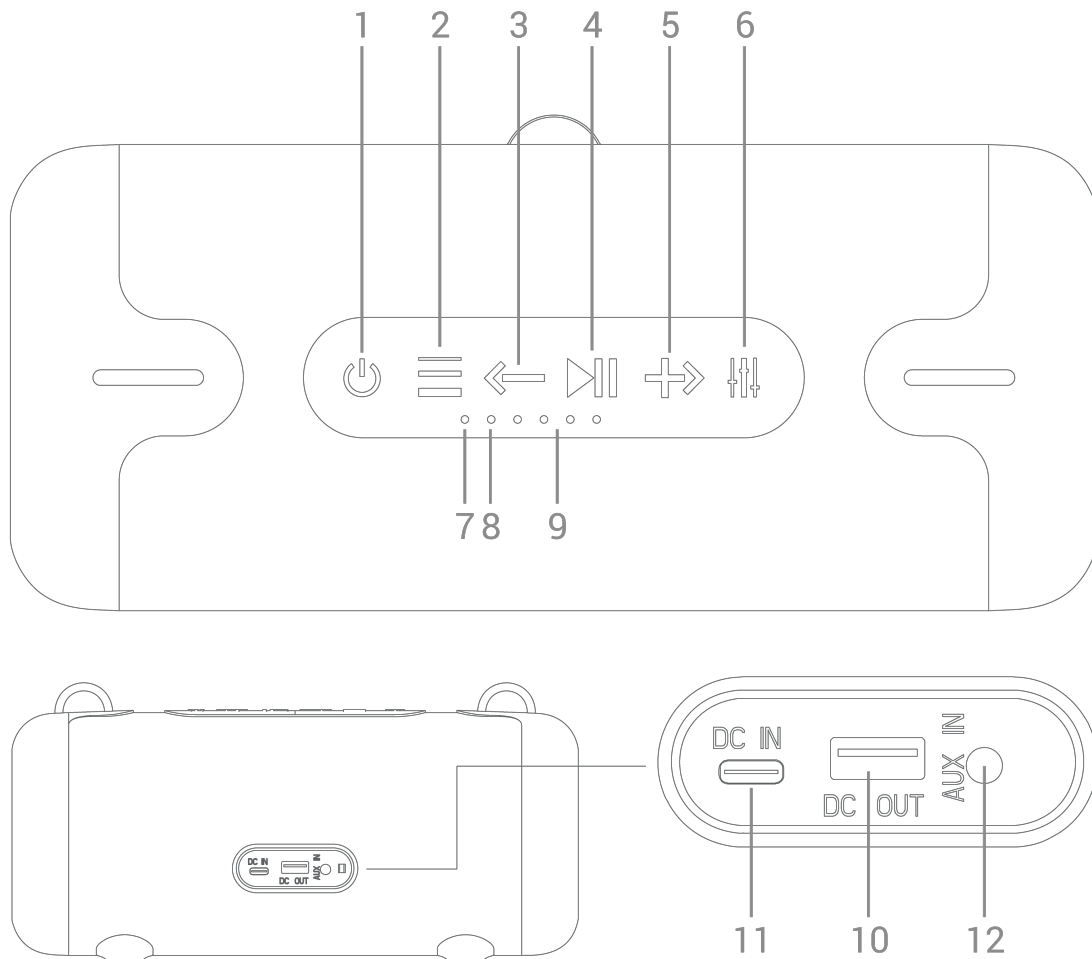

1. On/Off
2. Playback mode/Voice assistant
3. Volume -/Back
4. Multifunction button
5. Volume +/Next
6. EQ mode
7. Power on LED indicator
8. TWS LED indicator
9. Charging LED indicators
10. USB charging port
11. USB Type-C charging port
12. Auxiliary audio input

Switching on and off the device

To switch on your *Urban Box 6*, press and hold *On/Off* (1) for 2 seconds. You will hear a confirmation sound. At this point the *Power on LED indicator* (7) lights up blue.

To turn off the device, press and hold *On/Off (1)* for 2 seconds. You will also hear a confirmation sound. At this point the *Power on LED indicator (7)* switches off.

Important: To force the device to shut down, press the hidden reset button inside the *Auxiliary audio input (12)*.

Playback modes

Once the *Urban Box 6* is on, you can choose the playback mode you prefer. To do so, press *Playback mode/Voice assistant (2)* repeatedly until finding the preferred playback mode. Playback modes will appear in the following order:

Bluetooth® --> Audio-in

Playback control

Select a playback mode and you will be able to control all playback functions from your *Urban Box 6*.

Press *Playback mode (2)* to play or pause a song.

Press *Volume +/Next (5)* or *Volume -/Back (3)* to adjust the volume according to your preferences. You will hear a warning sound when reaching the maximum volume.

Press and hold *Volume +/Next (5)* or *Volume -/Back (3)* for 2 seconds to skip to the next or previous track. You can only control music playback from the speaker while using this mode.

Bluetooth® pairing

To pair your speaker with a Bluetooth® device, press *Playback mode/Voice assistant (2)*. Select Bluetooth mode. At this point the *Power on LED indicator (7)* flashes blue.

Access the Bluetooth settings on the source device and search for *Energy Sistem Urban Box 6* among the detected devices. Select it to establish the connection. Both devices will be connected immediately and you will hear a confirmation sound.

Your *Urban Box 6* connects to the last paired device automatically when you turn it back on, provided the Bluetooth connection on the source device is enabled.

Your *Urban Box 6* turns off automatically after 5 minutes if not paired with any device to prevent battery drain.

The Bluetooth wireless connection range is up to 20 metres.

Sound settings

Switch on your *Urban Box 6* and select the preferred EQ mode pressing the *EQ mode (6)* button. You can choose between the 3 EQ modes below:

- Flat Sound: This flat EQ mode is recommended to stream music in high fidelity.
- Deep Bass: This EQ mode enhances bass response.
- Outdoor Sound: This EQ mode boosts the gain.

The last selected mode is saved into the product's internal memory. The speaker enables this mode when turning it back on.

TWS (True Wireless Stereo)

This technology allows you to wirelessly connect another *Urban Box 6* within a maximum distance range of 20 meters to increase power. This way you will create a stereo sound system with separate left and right channels.

To do so, pair one of the speakers with your smartphone via the Bluetooth connection. Once you have done this, switch on the second speaker and enable Bluetooth mode.

Press and hold *Playback mode/Voice assistant (2)* for 2 seconds on both speakers. A few seconds later you will hear a sound confirming both devices are correctly paired.

The music plays through both speakers at the same time. One speaker will be assigned the left channel (L) and the other one the right channel (R).

Next time you turn on both speakers, they will pair with one another automatically, provided Bluetooth mode is enabled on both units.

If you want to disable the True Wireless Stereo function, press and hold *Playback mode/Voice assistant (2)* for 2 seconds on any of them. You will hear a confirmation sound. Both speakers will be disconnected.

Skip to the next/previous track and adjust the volume from any speaker while TWS mode is enabled. If you turn up the volume on any of the speakers, you will be turning up the volume of both of them at the same time.

Important: To use this function, Bluetooth mode must be enabled. In all other playback modes (AUX-in mode) a TWS connection is not possible.

Auxiliary audio input

Your *Urban Box 6* features an *Auxiliary audio input (12)* to connect your external devices using an audio cable with 3.5 mm mini jack plug.

Important:

-It is not possible to control music playback from the speaker while using this mode. You will have to use the connected music player instead.

-The maximum volume depends directly on the power of the signal transmitted by the source device.

Call control (hands-free function)

You can control your calls from the speaker itself. To do so, pair the *Urban Box 6* with your smartphone.

When receiving a call, the song you are listening to stops and the ringing tone sounds instead. To answer an incoming call, press the *Multifunction button (4)*. Press it once again to hang up.

Important: If you receive an incoming call while TWS mode is enabled, you will only hear the voice of the person who calls through the speaker connected to your smartphone.

Voice Assistant

Urban Box 6 allows you to activate your smartphone's voice assistant. Press the *Multifunction button (4)* twice in a row. This way you will directly activate your smartphone's assistant via wireless Bluetooth connection.

This function allows you to ask questions and use voice commands to perform tasks naturally and easily.

You can also take a look at Google Assistant and Siri user guides, available on their manufacturers' websites.

Charging the battery

When the battery level is below 5%, you will hear a sound reminding you to charge it. To charge the battery, plug the USB Type-C end of the provided USB cable into the *USB Type-C charging port (11)*, and the other USB end to any device with a 5 V USB port (PC, USB wall charger, car charger, etc.). The *Charging LED indicators (9)* light up as the battery charges. Once the charging process is complete, all LEDs will glow.

The speaker has an approximate battery life of 12 hours at medium volume. This value depends on the selected volume and the type of music.

The charging time is approximately 4 hours.

Important:

- Use a 5 V 3 A AC/DC power adapter.
- Do not leave your *Urban Box 6* completely discharged for a long time.

Charging other devices (Power Bank function)

The speaker features a USB-A port to charge other devices. This allows you to charge your smartphone or any other 5 V DC powered device.

To do so, simply connect the external device you wish to charge using a USB cable and switch on your *Urban Box 6*. At this point, the charging process starts. Once the external device is fully charged, your *Urban Box 6* turns off automatically when disconnecting the cable, provided the speaker is not playing music.

Resetting the device

To force the device to shut down, press the hidden reset button inside the *Auxiliary audio input (12)*.

Important: Avoid using metallic objects when performing the reset.

Warranty

Find the full warranty terms and conditions at:

<https://www.energysistem.com/terms-warranty>

Declaration of conformity

Issuer's name: Energy Sistem Technology, S.A. - CIF: A53107488

Address: C/ Calpe, 1 - 03509 Finestrat, Alicante (Spain)

Tel: +34 966 830 324

We declare under our sole and exclusive responsibility that the product:

Description: wireless speaker

Brand: Energy Sistem

Model: Urban Box 6

Manufacturer: Energy Sistem Technology, S.A.

Manufacturing country: China

referred to in this declaration complies with the essential norms and standards

EN IEC 62368-1-2020+A11: 2020

EN 50663: 2017; EN 62479: 2010

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)
EN 55032: 2017+A11: 2020
EN 55035: 2017+A11: 2020
ETSI EN 300 328 V2.2.2 (2019-07)

in conformity with the provisions of the Directive 2014/53/EU of the European Parliament and of the Council of 16th April 2014.

Finestrat, 1st September 2022



Miguel Ángel Aragüez García
Innovation and Technology Director



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Energy Sistem, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/energy-sistem-bluetooth-zvucnik-urban-box-6-navy-portable-akcija-cena/>