

## Informacije o proizvodu (EN)

nJoy Argus 3000 1800W UPS uređaj



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/njoy-argus-3000-1800w-ups-uredjaj-akcija-cena/>

# Argus 3000

The power to control

PN: PWUP-LI300AG-CG01B  
EAN: 6422956007799

## Specifications

<b>Capacity</b>	3000 VA / 1800 W
<b>Type</b>	Line-interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	165 - 276 VAC
Frequency Range	50Hz ~ 60 Hz (Auto sensing)
Power Factor	≥ 0.6 @ nominal voltage (100% load)
<b>Output</b>	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	50 Hz or 60Hz ± 1 Hz
Waveform (Batt. Mode)	Pure sine wave
Transfer Time	Typical 4 ms
Overload Protection	Inner firmware protection
<b>AVR</b>	
Type	1 Boost / 1 Buck
<b>Indicators type</b>	
LCD Display	Load level, Battery level, AC mode, Battery mode and Fault indicators
Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode and Fault indicators, etc.
<b>Protection</b>	
Outlets type	8 x IEC C13 Battery Backup & Surge Protection 2 x RJ11/45(IN/OUT) for modem/ phone/LAN surge protection
Full protection	Overload, deep discharge, Overcharge, Over-Voltage, High Temperature, Input spike protection
<b>Environment</b>	
Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 50dB



8 x IEC C13 outlets with protection



LCD Display



Pure sine wave output

- Pure sine wave output
- Line-interactive
- Auto restart while AC is recovering
- Auto-Charge
- Boost and buck AVR for voltage stabilization
- Software management
- Off-Mode Charging
- Cold start function
- Emergency power off function (EPO)
- Generator Compatible
- Smart SNMP card supported
- Rack design

## Battery

Battery Type & Number	4 x GP09122L PN: BTVACGUEBTI2LCG01B
Typical Recharge Time	4 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 18 min 50% Load - 7.5 min 75% Load - 4 min 100% Load - <2 min

## Management

Connection port	RS232, HID USB. Intelligent Port (not included in the package)
Software	<a href="http://www.powermonitor.software/">http://www.powermonitor.software/</a>
Software capability	Monitor & Control over USB, LAN and Internet (SNMP card optional)




## Physical

Product dimensions	400 x 438 x 88 mm - 2U
Product weight	22 kg
Retail Pack Dimensions	542 x 560 x 218 mm
Retail Pack Weight	23.6 kg



## Running time on battery

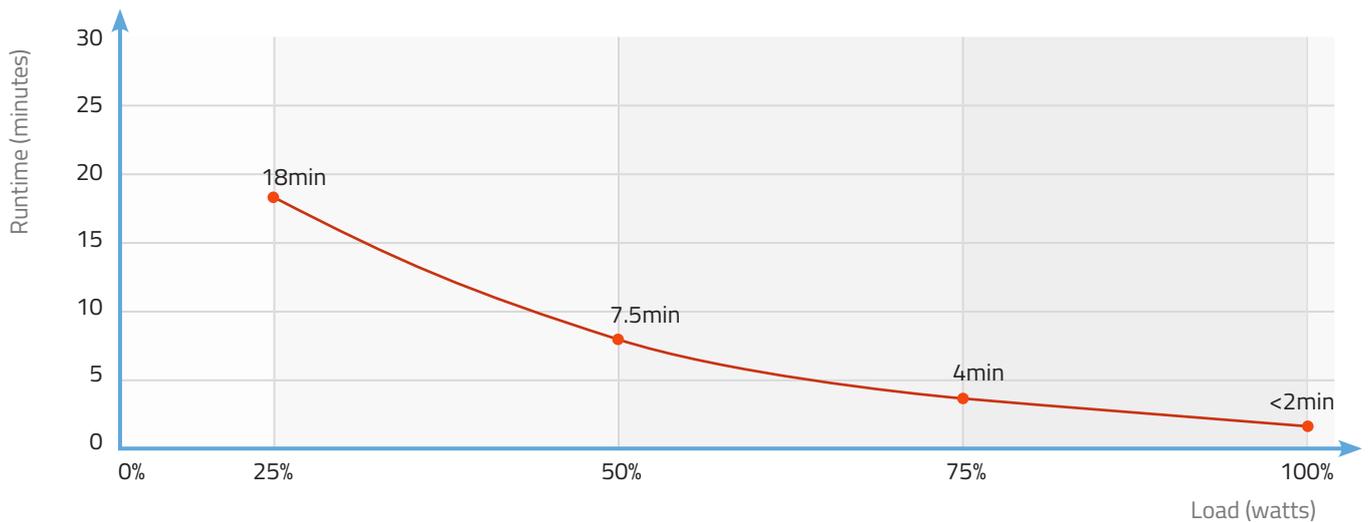

## Logistics

Carton Box Size (LxWxH)	542 x 560 x 218 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 22 kg / G.W.: 23.6 kg



## Certificates



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda nJoy, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/njoy-argus-3000-1800w-ups-uredjaj-akcija-cena/>