

Informacije o proizvodu (EN)

SOCOMEc NeTYS PE 1500VA UPS uređaj



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/socomec-netys-pe-1500va-ups-uredjaj-akcija-cena/>

NETYS PE

Practical and cost-effective protection
from 600 to 2000 VA



The solution for

- > CAD, graphic workstations
- > Multimedia workstations and peripherals
- > LCD screens and monitors
- > POS (Points Of Sales)

Technology

- > VI "line interactive" with AVR, step wave

Certifications



Ideal and cost-effective protection for SOHO or POS applications

- Adapted to protect IT applications in home, office and retail environments.
- A complete range of six models to adapt the power to the equipment's consumption or to required back-up time.

Easy to use

- Control panel with graphical icons LCD/LEDs allowing the operating mode to be easily monitored.

A solution for network power cuts and voltage fluctuations

- The integrated AVR function (Automatic Voltage Regulation) stabilizes the output voltage and avoids the switching to Battery Mode operation, therefore saving the battery to support critical power cut events.


Simplified connection

- Several IEC 320 sockets (IT standard) simplify the connectivity to computer and IT peripherals.

Protection for your data line

- Integrated NTP protection for LAN/ADSL connection against the risk of data line overvoltage.



Control panel

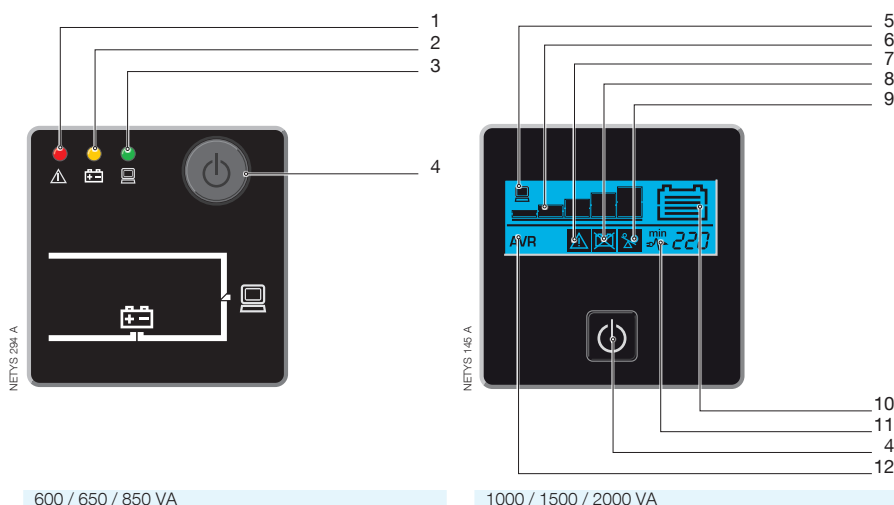

- 600 / 650 / 850 VA
1. Alarm
 2. Operation with battery
 3. Normal operation
 4. On / Off
 5. Load present
 6. Load level (5 steps)

- 1000 / 1500 / 2000 VA
7. General Alarm
 8. Battery fault / Replace the battery
 9. Overload
 10. Battery capacity
 11. Normal mode / Battery mode (flashing)
 12. Automatic Voltage / Regulation active

Connections

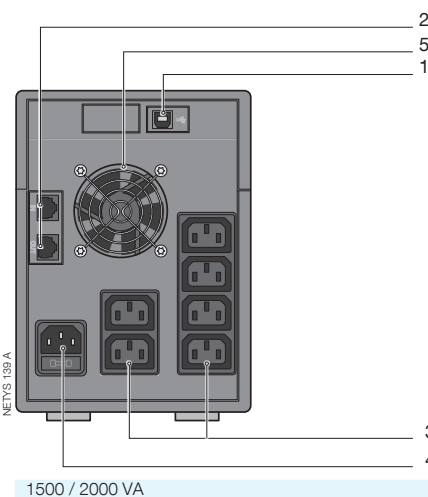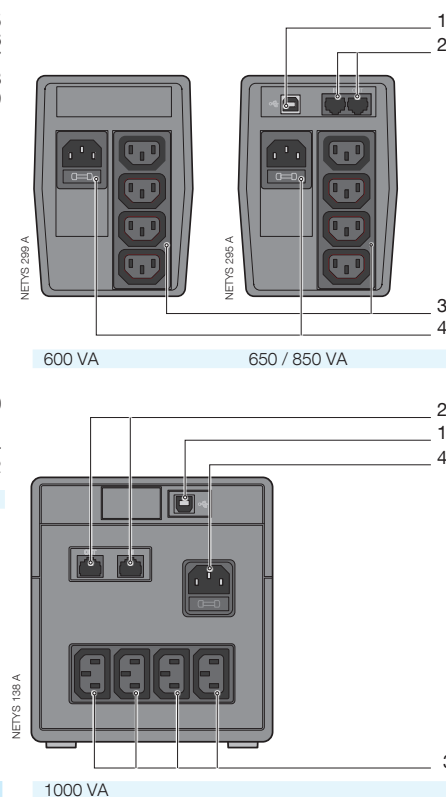

1. USB serial port
2. NTP data line suppressor
3. UPS output sockets
4. Input socket and fuse
5. Fan / air vents

Technical data

| NETYS PE | | | | | | |
|------------------------------------|---|----------|--------------------|----------------------------------|--------------------|--------------|
| Model | NPE-B600 | NPE-0650 | NPE-0850 | NPE-1000-LCD | NPE-1500-LCD | NPE-2000-LCD |
| Sn | 600 VA | 650 VA | 850 VA | 1000 VA | 1500 VA | 2000 VA |
| Pn | 360 W | 360 W | 480 W | 600 W | 900 W | 1200 W |
| Input/output | 1/1 | | | | | |
| INPUT | | | | | | |
| Rated voltage | 230 V | | | | | |
| Voltage tolerance | 170 - 280 V | | | | | |
| Rated frequency | 50/60 Hz with automatic selection | | | | | |
| Mains connection | IEC320 socket | | | | | |
| OUTPUT | | | | | | |
| Automatic Voltage Regulation (AVR) | • | • | • | • | • | • |
| Rated voltage (Battery Mode) | 230 V ±10% | | | | | |
| Rated frequency | 50/60 Hz ±1% | | | | | |
| Wave form | Step wave | | | | | |
| Protection | Overload, significant discharge and short circuit | | | | | |
| Connections | 4 x IEC 320 (C13) ⁽¹⁾ | | | 6 x IEC 320 (C13) ⁽¹⁾ | | |
| BATTERIES | | | | | | |
| Type | Sealed lead-acid maintenance free - expected life 3/5 years | | | | | |
| Back-up time ⁽²⁾ | 15 min | 15 min | 20 min | 45 min | 55 min | 60 min |
| COMMUNICATION | | | | | | |
| Interfaces | USB | | | | | |
| Local communication software | Local View | | | | | |
| Data Line protection | NTP data line suppressor | | | | | |
| UPS CABINET | | | | | | |
| Dimensions W x D x H | 100 x 300 x 145 mm | | 145 x 345 x 165 mm | | 145 x 390 x 205 mm | |
| Weight | 5.0 kg | 5.2 kg | 6.0 kg | 9.7 kg | 11.2 kg | 12 kg |
| STANDARDS | | | | | | |
| Safety | IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2 | | | | | |
| EMC | IEC/EN 62040-2, AS 62040.2 | | | | | |
| Product declaration | CE, RCM (E2376), UKCA | | | | | |

(1) Australian standard sockets on Netys PE models specific for Australia.

(2) PC + 17" LCD monitor.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Socomec, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/socomec-netys-pe-1500va-ups-uredjaj-akcija-cena/>