

Uputstvo za upotrebu (EN)

GIGABYTE napajanje Aorus Elite P1000W GP-AE1000PM

GIGABYTE™



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/gigabyte-napajanje-aorus-elite-p1000w-gp-ae1000pm-akcija-cena/>


GIGABYTE™

PSU Pinout Diagram

- GP-AE1000PM PG5
- GP-AE1000PM PG5 ICE


• M/B Side

1	UL2468 16#	+3.3V
2	UL2468 16#	+3.3V
3	UL2468 16#	GND
4	UL2468 16#	+5Vs
5	UL2468 16#	SGND
6	UL2468 16#	+5V
	UL2468 16#	+5V
7	UL2468 16#	GND
	UL2468 16#	GND
8	UL2468 16#	PG
9	UL2468 16#	+5Vsb
10	UL2468 16#	+12V
	UL2468 16#	+12V
11	UL2468 16#	+12V
	UL2468 16#	+12Vs
12	UL2468 16#	+3.3V
13	UL2468 16#	+3.3V
	UL2468 16#	+3.3Vs
14	UL2468 16#	-12V
15	UL2468 16#	GND
16	UL2468 16#	PSON
17	UL2468 16#	GND
18	UL2468 16#	GND
19	UL2468 16#	GND
20		
21	UL2468 16#	+5V
22	UL2468 16#	+5V
23	UL2468 16#	+5V
24	UL2468 16#	GND

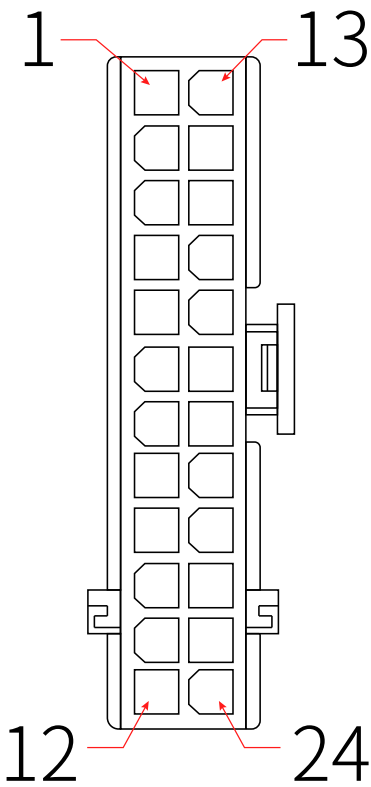


•PSU Side

1	UL2468 16#	PSON
2	UL2468 16#	+3.3Vs
3	UL2468 16#	SGND
4	UL2468 16#	-12V
5	UL2468 16#	GND
6	UL2468 16#	+3.3V
7	UL2468 16#	+3.3V
8	UL2468 16#	+5V
9	UL2468 16#	+5V
10	UL2468 16#	+5Vsb
11	UL2468 16#	PG
12	UL2468 16#	+5Vs
13	UL2468 16#	+12Vs
14	UL2468 16#	+3.3V
15	UL2468 16#	+3.3V
16	UL2468 16#	+5V
17	UL2468 16#	+5V
18	UL2468 16#	+5V

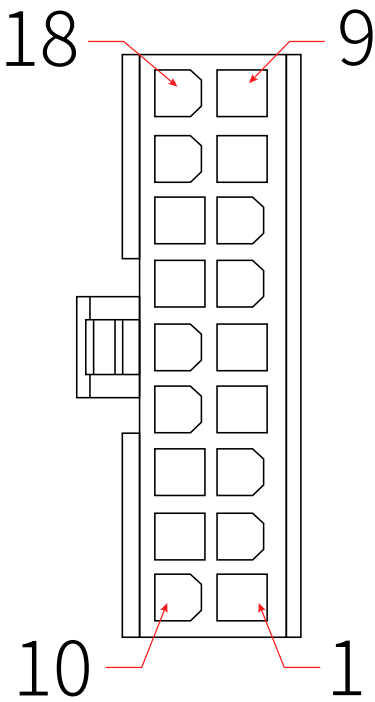


1	UL2468 16#	GND
2	UL2468 16#	GND
3	UL2468 16#	GND
4	UL2468 16#	GND
5	UL2468 16#	GND
6	UL2468 16#	GND
7	UL2468 16#	GND
8	UL2468 16#	+12V
9	UL2468 16#	+12V
10	UL2468 16#	+12V

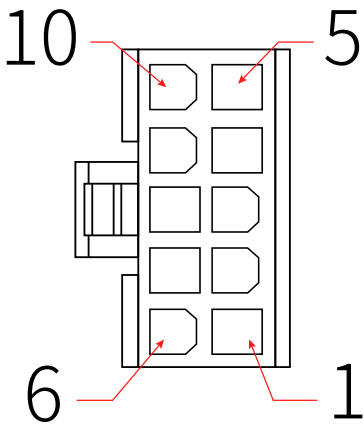


• M/B Side

1	GND
2	GND
3	GND
4	GND
5	+12V
6	+12V
7	+12V
8	+12V

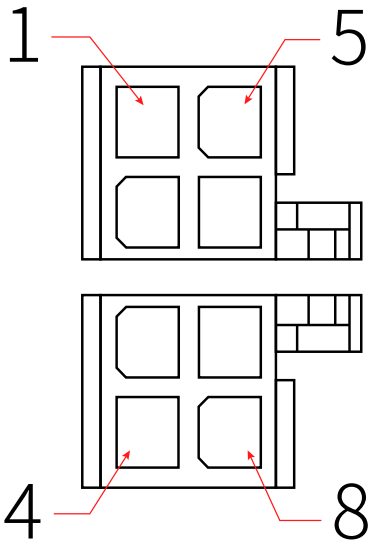


• PSU Side

1	GND
2	GND
3	+12V
4	+12V
5	GND
6	GND
7	+12V
8	+12V

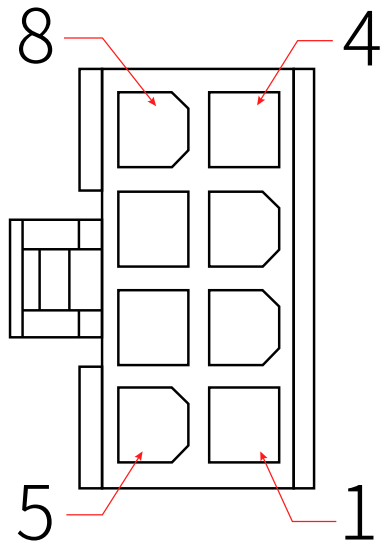


•VGA Side

1	+12V
2	+12V
3	+12V
4	GND
5	GND
6	GND
7	GND
8	GND

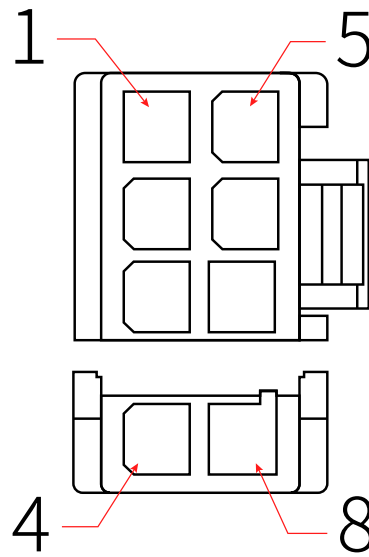

•PSU Side


1	GND*2
2	GND
3	+12V
4	NC
5	GND
6	GND
7	+12V
8	+12V

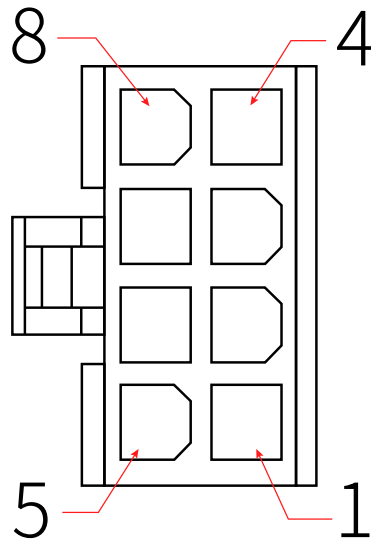

PATA


•Component Side

1	+12V
2	GND
3	GND
4	+5V

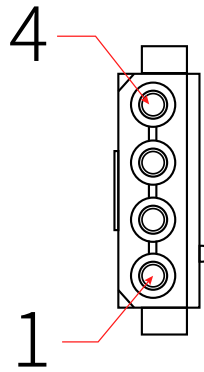

•PSU Side


1	NC
2	NC
3	+5V
4	GND
5	+12V
6	GND

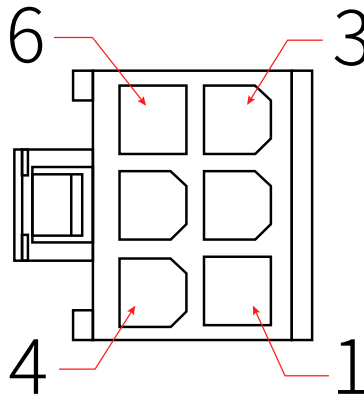

SATA


•Component Side

1	+3.3V
2	GND
3	+5V
4	GND
5	+12V

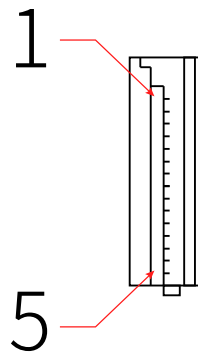


•PSU Side

1	+3.3V
2	NC
3	+5V
4	GND
5	+12V
6	GND

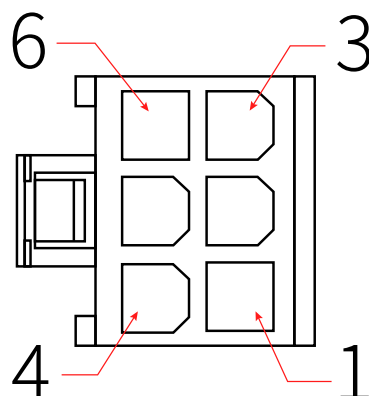

PCI-E 16 Pin

1	+12V
2	+12V
3	+12V
4	+12V
5	+12V
6	+12V
7	GND
8	GND
9	GND
10	GND
11	GND
12	GND
S1	CARD_PWR_STABLE
S2	CARD_CBL_PREP#
S3	SENSE 0
S4	SENSE 1

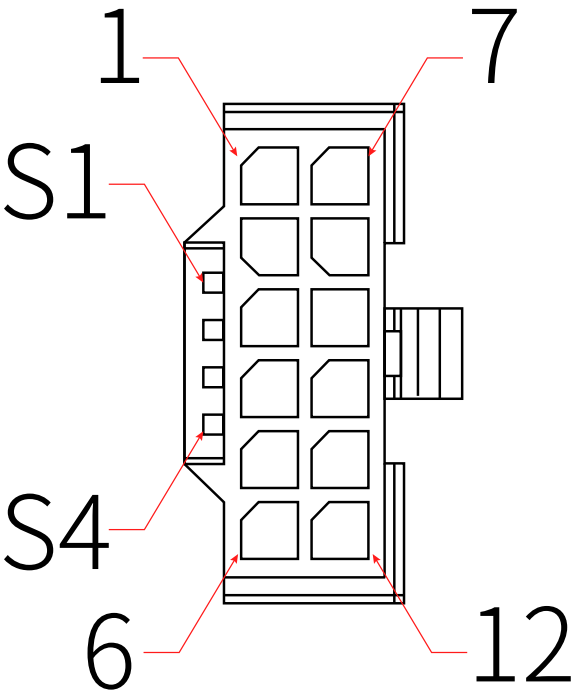

GIGABYTE™

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Gigabyte, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/gigabyte-napajanje-aorus-elite-p1000w-gp-ae1000pm-akcija-cena/>