

Informacije o proizvodu (EN)

CHIEFTEC napajanje PPX-1300FC-A3 1300W



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/chiefttec-napajanje-ppx-1300fc-a3-1300w-akcija-cena/>

- ATX 3.0 with PCIe GEN5
- 80 PLUS® PLATINUM certified efficiency
- Full Japanese Capacitors
- LLC Half-Bridge converter with DC-to-DC technology
- Fully modular cable management



The CHIEFTEC Polaris Pro Series features advanced thermal control with the **Zero RPM mode**, enabling the optimal balance between silence at low power consumption and ideal cooling, with **80 PLUS® PLATINUM** certified efficiency. Polaris Pro Series is designed for Intel's state-of-the-art ATX 3.0 standard with native PCIe GEN5 connector.

The Polaris Pro Series is built with **100% high-end Japanese capacitors** to achieve unprecedented tight voltage regulation and lower ripple and noise to maximize your system performance and excellent durability. **Fully modular cable management** ensures a clean and convenient build inside any system.



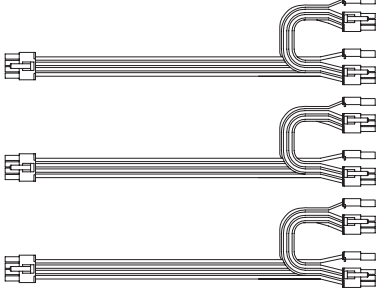






TECHNICAL DATA	
Model	Polaris PRO 1300W
Articel no.	PPX-1300FC-A3
Specification	ATX 12V 3.0
Form factor	ATX
Efficiency	80 PLUS® PLATINUM
PFC	Active PFC (0.9)
Fan	135mm FDB fan
Dimension (DxWxH)	160mm x 150mm x 86mm
Security	AFC (Automatic Fan speed Control) UVP (Under Voltage protection) OVP (Overvoltage protection) OPP (Overload protection) SCP (Short-circuit protection) OCP (Over-Current Protection) OTP (Over Temperature Protection) SIP (Surge & Inrush Protection)
Warranty	5 Years

OUTPUT DATA						
PPX-1300FC-A3	AC Input	100-240V~ / 15-8A / 50 - 60Hz				
	DC Output	+3.3V	+5V	+12V	-12V	+5VSB
	Max. Current	24A	24A	108.3A	0.5A	3.0A
	Max. Combined Power	120W		1300W	6W	15W
			1300W			

* The listed specifications may be altered at any point in time without any pre-notice.

** Chieftec® is a registered trademark. All other brands and/or logos are property of the respective owners.

	Cable	Connectors	Length (mm)
	24 PIN ATX	1	600
	8 PIN EPS (4+4)	2	2 x 700
	8 PIN PCIe (6+2)	6	3 x 500/150
	16 PIN PCIe GEN5	1	600
	SATA	12	3 x 550/100/100/100
	MOLEX	4	500/150/150/150
	FLOPPY	1	150

Certification



Version: 01/2023

* The listed specifications may be altered at any point in time without any pre-notice.

** Chieftec® is a registered trademark. All other brands and/or logos are property of the respective owners.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Chieftec, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/chieftec-napajanje-ppx-1300fc-a3-1300w-akcija-cena/>